



XEBEC TECHNOLOGY
Product Catalog
2025/2026

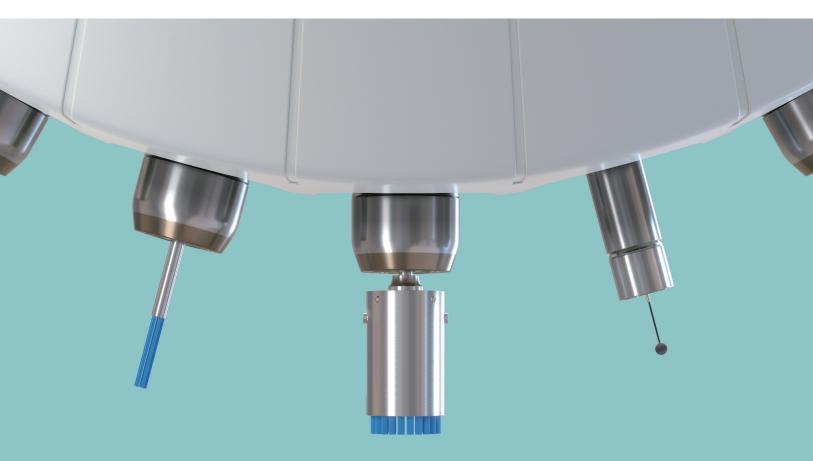

BEAUTIFUL DEBURRING®

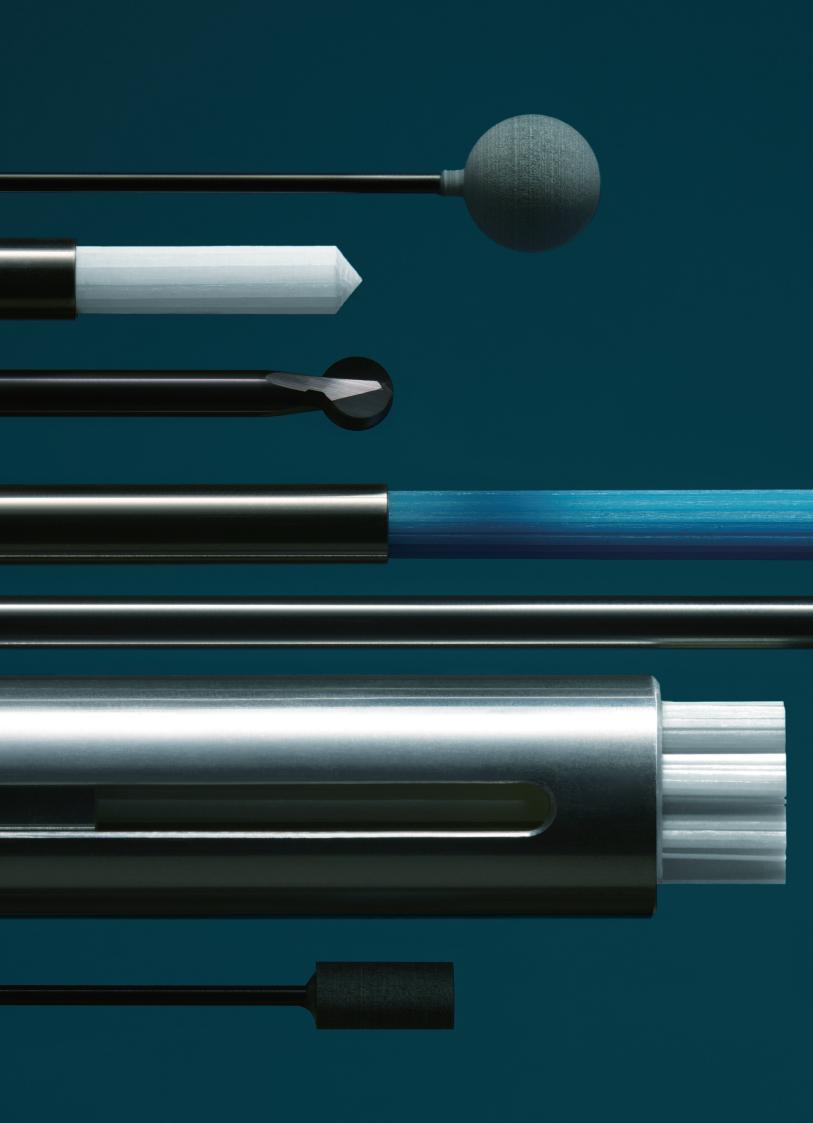

# INDEX

| Applications                                    | 3   |
|---|-----|
| Automotive                                      | 3   |
| Industrial Machinery                            | 4   |
| Aerospace                                       | 4   |
| Orthopedic Medical Devices                      | 4   |
| XEBEC Brush™                                    | 5   |
| XEBEC Brush™ Surface                            | 7   |
| XEBEC Brush™ Surface End Type                   | 9   |
| XEBEC Brush™ Surface Extra-Large                | 10  |
| XEBEC Brush™ Crosshole                          | 11  |
| XEBEC Brush™ Crosshole Extra-Large              | 13  |
| XEBEC Brush™ Crosshole Extra-Long               | 14  |
| XEBEC Brush™ Wheel Type                         | 15  |
| XEBEC Brush™ Turning                            | 17  |
| XEBEC Optional Tools                            | 21  |
| XEBEC Floating Holder™                          | 23  |
| XEBEC Self-Adjusting Sleeve™                    | 25  |
| XEBEC Short BT Holder™                          | 27  |
| XEBEC Brush Length Adjustment Tool™             | 27  |
| XEBEC Back Burr Cutter and Deburring Tool Path™ | 29  |
| XEBEC Back Burr Cutter™                         | 31  |
| XEBEC Deburring Tool Path™                      | 33  |
| XEBEC Burrless Chamfering Cutter™               | 35  |
| XEBEC Ceramic Stone™                            | 39  |
| XEBEC Stone™ Flexible Shaft                     | 41  |
| XEBEC Stone™ Mounted Point                      | 43  |
| Mobile Micromotor System                        | 45  |
| Technical Information                           | 46  |
| About XEBEC                                     | 53  |
| Lista m.  | E A |

# Applications

#### **Automotive**

#### CNC deburring of cylinder head



Material: ADC12 Follows: Face milling Tool: XEBEC Brush Surface A11-CB100M, p. 7



VIDEO

#### ----



Material: ADC12 Follows: Face milling Tool: XEBEC Brush Surface A32-CB25M, p. 7



VIDEO

#### CNC removal of coating on combustor part



Material: Ceramics Follows: Face milling Tool: XEBEC Brush Surface A11-CB15M, p. 7



VIDEO

#### CNC deburring of input shaft



Material: SCM Follows: Drilling Tool: XEBEC Brush Crosshole CH-A12-7M-TL, p. 11



VIDEO

#### Manual polishing of tire mold



Material: Aluminum Follows: Ball end milling Tool: XEBEC Brush Surface End Type A11-EB06M, p. 9



VIDEO

#### CNC deburring of differential case



Material: FCD Follows: Drilling Tool: Back Burr Cutter & Deburring Tool Path, XC-78-A, p. 31



VIDEO

#### CNC deburring of scroll compressor




Material: Aluminum Follows: Face milling Tool: XEBEC Brush Surface A11-CB40M, p. 7



VIDEO

#### CNC deburring of pinion gear



Material: S45C Follows: Gear hobbing Tool: XEBEC Brush Surface A32-CB40M, p. 7



VIDEO

#### CNC polishing of metal mold for car body panel



Material: SKD11 Follows: End milling Tool: XEBEC Brush Surface A32-CB25M & A11-CB25M, p. 7



VIDEO

#### CNC deburring of yoke



Material: SCM Follows: Drilling Tool: Back Burr Cutter & Deburring Tool Path, XC-58-A, p. 31



VIDEO

#### CNC deburring of camshaft




Material: FCD Follows: Drilling Tool: Back Burr Cutter & Deburring Tool Path, XC-38-A, p. 31



VIDEO

#### Chamfering of exterior part



Material: CFRP
Follows: Tapping
Tool:
Burrless Chamfering Cutter
XC-C-06-N, p. 37



VIDEO

■ Material names are JIS. Common names are used when the JIS name is unavailable.

## **Industrial Machinery**

#### **CNC** deburring of gearbox



Material: FC250 Follows: Face milling Tool: XEBEC Brush Surface A32-CB60M, p. 7



VIDEO

#### CNC deburring of slide cylinder



Material: Aluminum Follows: End milling Tool: XEBEC Brush Surface A21-CB25M, p. 7



VIDEO

#### CNC roughing of brake disc




Material: SPHC Follows: Turning Tool: XEBEC Brush Surface A21-CB25M, p. 7



VIDEO

#### CNC deburring of pipe



Material: Stainless steel Follows: Drilling Tool: XEBEC Brush Crosshole CH-A33-7M, p. 11



VIDEO

#### CNC deburring of shaft



Material: SCM Follows: Threading Tool: XEBEC Brush Wheel Type W-A11-50, p. 15



VIDEO

## **Aerospace**

#### CNC polishing of turbine blade



Material: SUS630 Follows: Ball end milling Tool: XEBEC Brush Surface A32-CB25M & A11-CB25M, p. 7



VIDEO

## **Orthopedic Medical Devices**

#### CNC polishing of artificial hip joint




Material: CoCrMo Follows: Turning Tool: XEBEC Brush Surface A13-CB06M, p. 7



VIDEO

#### Manual deburring of hydraulic manifold



Material: Aluminum Follows: Drilling Tool: XEBEC Stone Flexible Shaft CH-PM-6B, p. 41



VIDEO

#### CNC deburring of osteosynthesis screw



Material: Titanium Follows: End milling Tool: XEBEC Brush Surface End Type A11-EB06M, p. 9



VIDEO

#### Manual deburring of shaft



Material: Aluminum Follows: Casting Tool: XEBEC Stone Mounted Point AX-PM-6T, p. 43



VIDEO

#### CNC deburring of spinal implant



Material: PEEK resin Follows: End milling Tool: Back Burr Cutter & Deburring Tool Path, XC-18-A, p. 31



VIDEO

## Automate deburring and polishing in your CNC machine


# XEBEC Brush TM

"What if we could make a brush out of the same material as ceramic grinding stones. It would be truly groundbreaking!"

And so, the ceramic brush was born. It was one of a kind; the result of a desire to challenge technological norms. Yet no one quite understood what it could be used for. Some forward-thinking users believed in its potential. Thanks to them, we found out it could remove fine burrs and improve surface roughness at the same time. They also found it easy to manage compared with conventional brushes. This resulted in us pioneering the concept of automated deburring and polishing.




XEBEC Brush uses unique abrasive ceramic fiber material instead of abrasive grain. Each bristle consists of 1,000 ceramic fibers that work as cutting edges. Overwhelming grinding power, consistent cutting performance, and no deformation enables CNC deburring immediately after machining operations inside the same machine tool.

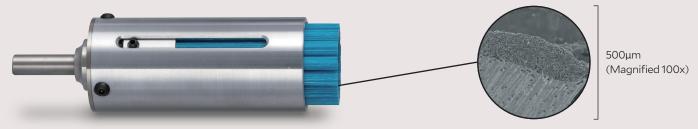


#### High grinding power

The content ratio of ceramic fiber is approximately 80%. Cutting edges on the brush tips offer excellent grinding power.

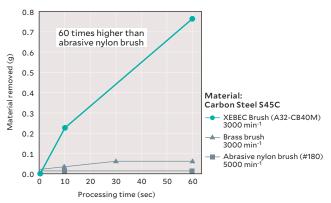


# No deformation

Maintains its straight shape and does not spread out like an old toothbrush. Easy to manage on mass production lines.

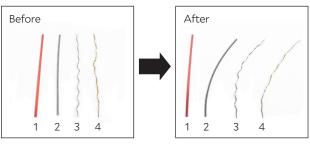

- 1. XEBEC Brush (A11 red bristle)
- 2. Abrasive nylon brush
- 3. Steel wire brush
- 4. Brass wire brush


#### **Brush selection**

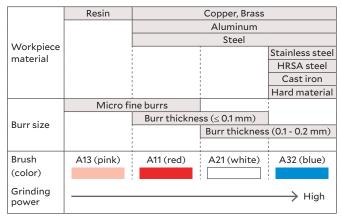

- Not all brush colors are available in all sizes.
- HRSA (heat resistant super alloy)


#### **Consistent grinding performance**

New cutting edges are always exposed. Consistent grinding performance throughout due to the uniform structure of the fiber.




#### **Optimal for polishing**

The high grinding power of ceramic fiber makes this tool optimal for polishing. Achievable surface roughness is Ra = 0.1  $\mu$ m (Rz = 0.4  $\mu$ m).

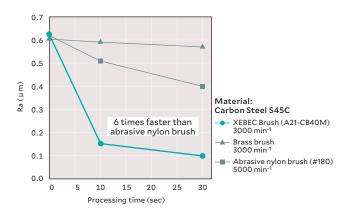

#### Deburring





#### Polishing





#### XEBEC Brush<sup>TM</sup> Surface (Patented)



Deburring, cutter mark removal, and surface polishing

#### Burr thickness $\leq$ 0.2 mm (Burrs this size can be bent by fingernails)

Applicable burr size



#### Applicable equipment

This tool can be mounted on equipment shown below.









Machining center

Lathe (with live tools)

Dedicated machine


Robot

#### **Tool composition**

Brush and sleeve are sold separately. Assemble brush and sleeve before use.




Brush




#### **Brushes**

| Brush (color) | Product code | Brush diameter (mm) | Bristle length $\ell$ (mm) | Matching sleeve | Fig. |
|---------------|--------------|---------------------|----------------------------|-----------------|------|
| A12 (piple)   | A13-CB06M    | ф6                  | 30                         | S06M            | 1    |
| A13 (pink)    | A13-CB15M    | ф15                 | 50                         | S15M-P          | 1    |
|               | A11-CB06M    | ф6                  | 30                         | S06M            | 1    |
|               | A11-CB15M    | ф15                 | 50                         | S15M-P          | 1    |
| A11 (red)     | A11-CB25M    | ф25                 | 75                         | S25M            | 1    |
| All (red)     | A11-CB40M    | ф40                 | 75                         | S40M-SD10       | 1    |
|               | A11-CB60M    | ф60                 | 75                         | S60M            | 1    |
|               | A11-CB100M   | ф100                | 75                         | S100M           | 1    |
|               | A21-CB06M    | ф6                  | 30                         | S06M            | 1    |
|               | A21-CB15M    | ф15                 | 50                         | S15M-P          | 1    |
| A 21 (white)  | A21-CB25M    | ф25                 | 75                         | S25M            | 1    |
| A21 (white)   | A21-CB40M    | ф40                 | 75                         | S40M-SD10       | 1    |
|               | A21-CB60M    | ф60                 | 75                         | S60M            | 1    |
|               | A21-CB100M   | ф100                | 75                         | S100M           | 1    |
|               | A32-CB06M    | ф6                  | 30                         | S06M            | 1    |
|               | A32-CB15M    | ф15                 | 50                         | S15M-P          | 1    |
| A32 (blue)    | A32-CB25M    | ф25                 | 75                         | S25M            | 1    |
| A32 (blue)    | A32-CB40M    | ф40                 | 75                         | S40M-SD10       | 1    |
|               | A32-CB60M    | ф60                 | 75                         | S60M            | 1    |
|               | A32-CB100M   | ф100                | 75                         | S100M           | 1    |

- Bristle bundles are embedded in a single line on the periphery (except for φ6 type).
- Brush size is approximate as the tip expands with rotation.
- Brushes larger than φ100 are available by special order. Refer to page 10.









#### **Sleeves**

| Product code | Brush dia.<br>(mm) | External dia. Dc<br>(mm) | Shank dia. Ds<br>(mm) | Overall length L<br>(mm) | Shank length \( \ext{ls} \) (mm) | Matching brush        | Fig. |
|--------------|--------------------|--------------------------|-----------------------|--------------------------|----------------------------------|-----------------------|------|
| S06M         | ф6                 | ф10                      | ф6                    | 70                       | 29                               | A13/A11/A21/A32-CB06M | 2    |
| S15M-P       | ф15                | ф18.5                    | ф6                    | 90                       | 29                               | A13/A11/A21/A32-CB15M | 2    |
| S25M         | ф25                | ф30                      | ф8                    | 140                      | 30                               | A11/A21/A32-CB25M     | 2    |
| S40M-SD10    | ф40                | ф45                      | ф10                   | 140                      | 30                               | A11/A21/A32-CB40M     | 2    |
| S60M         | ф60                | ф65                      | ф12                   | 150                      | 35                               | A11/A21/A32-CB60M     | 2    |
| S100M        | ф100               | ф110                     | ф16                   | 162                      | 40                               | A11/A21/A32-CB100M    | 2    |

- Overall length L is sleeve length not including brush projecton.
- The case of the S15M-P is made of fiber-reinforced plastic (FRP).

#### **Applications**

#### Higher quality automated deburring

#### Cylinder head



Material: Aluminum Follows: Face milling Tool: A11-CB100M

#### **Before**

Abrasive nylon brush was used. It was time-consuming and not able to remove all burrs.

#### After

All burrs are removed by high grinding power. Quality is stable. The cycle time is shortened by a high feed rate.

#### Automation of time-consuming polishing

#### Metal mold



Material: Hard material Follows: End milling Tool: A11-CB25M

#### **Before**

40 minutes hand polishing per workpiece. Uneven quality resulted in complaints.


#### After

Shortened the polishing time to one minute per workpiece by automation. Achieved uniform polishing quality.

#### How to use


#### **Rotational speed**

Recommended parameters differ depending on brush size. Refer to the chart below for starting parameters for each brush size.

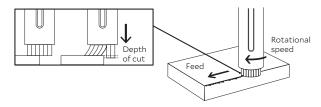

#### **Rotational direction**

Set the rotational direction so that the brush pushes the burrs up from below.

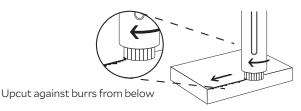

#### Feed rate - Deburring

Burr thickness: 0.05 mm (Very easily bent by fingernails)

4000 mm/min

Burr thickness: 0.1 mm (Easily bent by fingernails)

2500 mm/min

#### Feed rate - Polishing

Cutter mark removal, polishing

250 - 850 mm/min

#### Depth of cut - Vertical burrs

Formed by end milling & drilling (Are vertical to brush tip)

0.5 mm

#### Depth of cut - Horizontal burrs

Formed by face milling (Are horizontal to brush tip)

1.0 mm

#### Depth of cut - Polishing

Cutter mark removal, polishing

0.3 - 0.5 mm

#### Starting parameters

|  | Rotat     | ional speed (                           | (min <sup>-1</sup> ) | De                | pth of cut (n       | nm)                                     | Fee                          | d rate (mm/                 | min)                                    | Brush proti | rusion (mm)                             |
|--|-----------|---|----------------------|-------------------|---------------------|---|------------------------------|-----------------------------|---|-------------|---|
| Product code                           | Deburring | Cutter<br>mark<br>removal,<br>polishing | Maximum              | Vertical<br>burrs | Horizontal<br>burrs | Cutter<br>mark<br>removal,<br>polishing | Burr<br>thickness<br>0.05 mm | Burr<br>thickness<br>0.1 mm | Cutter<br>mark<br>removal,<br>polishing | Deburring   | Cutter<br>mark<br>removal,<br>polishing |
| A13-CB06M<br>A11-CB06M<br>A21-CB06M    | 8000      | 10000                                   | 10000                | 0.5               | 0.5                 | 0.3                                     | 4000                         | 2500                        | 250                                     | 10          | 10                                      |
| A32-CB06M                              | 8000      | 10000                                   | 10000                | 0.3               | 0.3                 | 0.3                                     | 4000                         | 2500                        | 250                                     | 10          | 10                                      |
| A13-CB15M                              | 4800      | 6000                                    | 6000                 | 1.0               | 1.0                 | 0.5                                     | 4000                         | 2500                        | 450                                     | 10          | 10                                      |
| A11-CB15M<br>A21-CB15M<br>A32-CB15M    | 4800      | 6000                                    | 6000                 | 0.5               | 1.0                 | 0.5                                     | 4000                         | 2500                        | 450                                     | 10          | 10                                      |
| A11-CB25M<br>A21-CB25M<br>A32-CB25M    | 4000      | 5000                                    | 5000                 | 0.5               | 1.0                 | 0.5                                     | 4000                         | 2500                        | 700                                     | 15          | 10                                      |
| A11-CB40M<br>A21-CB40M<br>A32-CB40M    | 2400      | 3000                                    | 3000                 | 0.5               | 1.0                 | 0.5                                     | 4000                         | 2500                        | 800                                     | 15          | 10                                      |
| A11-CB60M<br>A21-CB60M<br>A32-CB60M    | 1600      | 2000                                    | 2000                 | 0.5               | 1.0                 | 0.5                                     | 4000                         | 2500                        | 850                                     | 15          | 10                                      |
| A11-CB100M<br>A21-CB100M<br>A32-CB100M | 960       | 1200                                    | 1200                 | 0.5               | 1.0                 | 0.5                                     | 4000                         | 2500                        | 850                                     | 15          | 10                                      |

<sup>■</sup> Plastic workpieces may deform or discolor. If this occurs, reducing rotational speed to approximately 10% of the starting parameter may solve the problem.


# **XEBEC Brush™ Surface End Type**

Cutter mark removal and polishing on sealing surfaces



#### Applicable burr size

Burr thickness ≤ 0.1 mm (Burrs this size can be easily bent by fingernails)



#### Applicable equipment

This tool can be used with equipment that controls rotational speed.











Machining center

Lathe (with live tools)

Dedicated machine

Robot

Rotary tool (electric)

#### **Brushes**


| Brush (color)  | Product code | Brush dia. | Shank dia. Dc | Bristle<br>length & | Overall<br>length L | Standard rotational speed | Maximum rotational speed | Fig. |
|----------------|--------------|------------|---------------|---------------------|---------------------|---------------------------|--------------------------|------|
| brusii (Color) | Product code | (mm)       | (mm)          | (mm)                | (mm)                | (min <sup>-1</sup> )      | (min <sup>-1</sup> )     | rig. |
|                | A13-EB01S    | ф1         | ф3            | 15                  | 52                  | 7000 - 12000              | 15000                    | 3    |
|                | A13-EB015S   | φ1.5       | ф3            | 15                  | 52                  | 7000 - 12000              | 15000                    | 3    |
| A13 (pink)     | A13-EB02S    | ф2         | ф3            | 15                  | 52                  | 7000 - 12000              | 15000                    | 3    |
|                | A13-EB025S   | ф2.5       | ф3            | 15                  | 52                  | 7000 - 12000              | 15000                    | 3    |
|                | A13-EB03M    | ф3         | ф3            | 30                  | 67                  | 4000                      | 6000                     | 3    |
|                | A11-EB01S    | ф1         | ф3            | 15                  | 52                  | 7000 - 12000              | 15000                    | 3    |
|                | A11-EB015S   | ф1.5       | ф3            | 15                  | 52                  | 7000 - 12000              | 15000                    | 3    |
| A11 (red)      | A11-EB02S    | ф2         | ф3            | 15                  | 52                  | 7000 - 12000              | 15000                    | 3    |
|                | A11-EB025S   | ф2.5       | ф3            | 15                  | 52                  | 7000 - 12000              | 15000                    | 3    |
|                | A11-EB06M    | ф5         | ф3            | 20                  | 57                  | 7000                      | 12000                    | 4    |
| A21 (white)    | A21-EB06M    | ф5         | ф3            | 20                  | 57                  | 7000                      | 12000                    | 4    |
| A32 (blue)     | A32-EB06M    | ф5         | ф3            | 20                  | 57                  | 7000                      | 12000                    | 4    |

■ Brush size is approximate as the tip expands with rotation.

#### Precautions for use

The grinding load must less be than 2 N for hand use. The brush will break if:

- used beyond the maximum rotational speed
- used beyond the maximum indentation load
- used with a pneumatic rotary tool

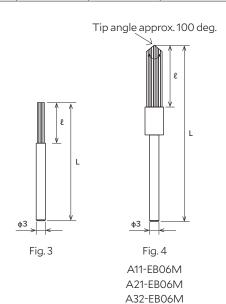






# **XEBEC Brush™ Surface Extra-Large**



Deburring, cutter mark removal, surface polishing (≥100 mm)

#### Applicable burr size

Burr thickness  $\leq$  0.2 mm (Burrs this size can be bent by fingernails)







#### Applicable equipment

This tool can be mounted on equipment shown below.







Machining center

Lathe (with live tools)

Dedicated machine

#### **Tool composition**

The brush main unit and slide ring are separate items. Assemble the main unit and slide ring before use.





Slide ring


- Ring
- · Base holder
- Shank





#### **Brushes**

| Brush (color) | Product code | Brush diameter (mm) | Bristle length ℓ<br>(mm) | Matching slide ring<br>(Product code) | Fig. |
|---------------|--------------|---------------------|--------------------------|---------------------------------------|------|
|               | A11-CB125M   | ф125                | 75                       | SR125M                                | 5    |
| A11 (red)     | A11-CB165M   | ф165                | 75                       | SR165M                                | 5    |
|               | A11-CB200M   | ф200                | 75                       | SR200M                                | 5    |
|               | A21-CB125M   | ф125                | 75                       | SR125M                                | 5    |
| A21 (white)   | A21-CB165M   | ф165                | 75                       | SR165M                                | 5    |
|               | A21-CB200M   | ф200                | 75                       | SR200M                                | 5    |
|               | A32-CB125M   | ф125                | 75                       | SR125M                                | 5    |
| A32 (blue)    | A32-CB165M   | ф165                | 75                       | SR165M                                | 5    |
|               | A32-CB200M   | ф200                | 75                       | SR200M                                | 5    |




#### Slide rings

| Product code | Brush diameter (mm) | Outer dia. Dc<br>(mm) | Shank diameter (mm) | Overall length L<br>(mm) | Fig. |
|--------------|---------------------|-----------------------|---------------------|--------------------------|------|
| SR125M       | ф125                | ф135                  | ф25                 | 187                      | 5    |
| SR165M       | ф165                | ф176                  | ф25                 | 187                      | 5    |
| SR200M       | ф200                | ф211                  | ф25                 | 187                      | 5    |

- The slide ring consists of a ring, base holder and shank.
- lacktriangle Base holder and shank sizes are the same for all brush diameters. Ring size varies with brush diameter.
- Combined weights of brushes and slide rings are: \$\phi125: 1920 g\$, \$\phi165: 2320 g\$ and \$\phi200: 2750 g\$.



Fig. 5



#### Starting parameters

|  | Rotat     | ional speed (                           | (min <sup>-1</sup> ) | De                | Depth of cut (mm)   |   |                              | Feed rate (mm/min)          |   |           | Brush protrusion (mm)                   |  |
|--|-----------|---|----------------------|-------------------|---------------------|---|------------------------------|-----------------------------|---|-----------|---|--|
| Product code                           | Deburring | Cutter<br>mark<br>removal,<br>polishing | Maximum              | Vertical<br>burrs | Horizontal<br>burrs | Cutter<br>mark<br>removal,<br>polishing | Burr<br>thickness<br>0.05 mm | Burr<br>thickness<br>0.1 mm | Cutter<br>mark<br>removal,<br>polishing | Deburring | Cutter<br>mark<br>removal,<br>polishing |  |
| A11-CB125M<br>A21-CB125M<br>A32-CB125M | 800       | 1000                                    | 1000                 | 0.5               | 1.0                 | 0.5                                     | 4000                         | 2500                        | 700                                     | 15        | 10                                      |  |
| A11-CB165M<br>A21-CB165M<br>A32-CB165M | 600       | 750                                     | 750                  | 0.5               | 1.0                 | 0.5                                     | 4000                         | 2500                        | 700                                     | 15        | 10                                      |  |
| A11-CB200M<br>A21-CB200M<br>A32-CB200M | 480       | 600                                     | 600                  | 0.5               | 1.0                 | 0.5                                     | 4000                         | 2500                        | 650                                     | 15        | 10                                      |  |

## **XEBEC Brush™ Crosshole**

#### Applicable burr size

Burr thickness ≤ 0.1 mm (Burrs this size can be easily bent by fingernails)

Deburring, cutter mark removal, polishing on inner diameters & counterbores (≤ \$\phi 20\$ mm)



#### Applicable equipment

This tool is used on equipment with rotational speed control (> 6500 min<sup>-1</sup>).









Machining center

Lathe (with live tools)

Dedicated machine

d

#### **Brushes**

| Brush (color)   | Product code | Brush dia. | Shank d | ia. (mm) | Shank<br>length ls | Bristle<br>length & | Overall<br>length L | Maximum rotational speed | Target hole<br>diameter | Fig.  |
|-----------------|--------------|------------|---------|----------|--------------------|---------------------|---------------------|--------------------------|-------------------------|-------|
| Di doli (color) | Troduct code | (mm)       | Dc      | Ds       | (mm)               | (mm)                | (mm)                | (min <sup>-1</sup> )     | (mm)                    | 1 19. |
|                 | CH-A12-1.5M  | ф1.5       | ф2.5    | ф3       | 30                 | 50                  | 120                 | 20000                    | ф3.5 – 5                | 6     |
|                 | CH-A12-3M-TL | ф3         | ф4      | ф3       | 30                 | 50                  | 120                 | 14000                    | ф5 – 8                  | 6     |
|                 | CH-A12-3L-TL | ф3         | ф4      | ф4       | 30                 | 50                  | 170                 | 12000                    | ф5 – 8                  | 6     |
|                 | CH-A12-5M-TL | ф5         | ф6      | ф6       | 30                 | 50                  | 120                 | 14000                    | ф8 – 10                 | 6     |
| A12 (red)       | CH-A12-5L-TL | ф5         | ф6      | ф6       | 30                 | 50                  | 170                 | 12000                    | ф8 – 10                 | 6     |
|                 | CH-A12-7M-TL | ф7         | ф8      | ф6       | 30                 | 50                  | 120                 | 14000                    | ф10 – 20                | 6     |
|                 | CH-A12-7L-TL | ф7         | ф8      | ф8       | 30                 | 50                  | 170                 | 12000                    | ф10 – 20                | 6     |
|                 | CH-A12-11M   | ф11        | ф12     | ф12      | 30                 | 50                  | 120                 | 14000                    | ф14 – 20                | 6     |
|                 | CH-A12-11L   | ф11        | ф12     | ф12      | 30                 | 50                  | 170                 | 12000                    | ф14 – 20                | 6     |
|                 | CH-A33-3M    | ф3         | ф4      | ф3       | 30                 | 60                  | 130                 | 14000                    | ф5 – 8                  | 6     |
|                 | CH-A33-3L    | ф3         | ф4      | ф4       | 30                 | 60                  | 180                 | 12000                    | ф5 – 8                  | 6     |
|                 | CH-A33-5M    | ф5         | ф6      | ф6       | 30                 | 60                  | 130                 | 14000                    | ф8 – 10                 | 6     |
| A33 (blue)      | CH-A33-5L    | ф5         | ф6      | ф6       | 30                 | 60                  | 180                 | 12000                    | ф8 – 10                 | 6     |
| A33 (blue)      | CH-A33-7M    | ф7         | ф8      | ф6       | 30                 | 60                  | 130                 | 14000                    | ф10 – 14                | 6     |
|                 | CH-A33-7L    | ф7         | ф8      | ф8       | 30                 | 60                  | 180                 | 12000                    | ф10 – 14                | 6     |
|                 | CH-A33-11M   | ф11        | ф12     | ф12      | 30                 | 60                  | 130                 | 14000                    | ф14 – 20                | 6     |
|                 | CH-A33-11L   | ф11        | ф12     | ф12      | 30                 | 60                  | 180                 | 12000                    | ф14 – 20                | 6     |

■ Brush size is approximate as the tip expands with rotation.

#### Precautions for use

The shank must be inserted ≥ 30 mm in the holder to secure it properly.

The brush will break if:

- used beyond the maximum rotational speed
- used with pneumatic or electric rotary tools
- rotated outside of the bore (outside workpiece)
- used with brush tip < 20 mm inside bore

The brush may break when used with:

- off-center or angled crossholes
- t-shaped holes, when secondary bore diameter ≥ main bore
- crossholes, when secondary bore diameter  $\geq$  70 % main bore





Fig. 6

Refer to p. 50 to select brush color

#### **Applications**

#### Automation of crosshole deburring

#### Input shaft



Material: SCM Follows: Drilling Tool: CH-A12-7M-TL

#### **Before**

Manual deburring by abrasive nylon brush. Not all burrs were removed and output was low.

A dedicated machine is used to automate deburring. All burrs are removed by high grinding power. Quality is stable.

#### Automation of crosshole deburring

#### Valve case



Material: Resin Follows: Drilling Tool: CH-A12-5M-TL


#### **Before**

Manual deburring by cutter was time-consuming. Cutter left scratches on inner surface.

Deburring inside the machine reduced cycle time significantly. No scratching on inner surface and finish quality is stable.

#### How to use

Caution: Rotating the brush outside of the bore may damage the brush and cause injury to the operator.

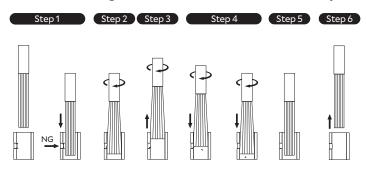


- 1. Insert the brush stationary into the bore.
- 2. Rotate the tool once past the crosshole.
- 3. Machine while pulling the brush back.
- 4. Machine while pushing the brush forward.
- 5. Stop the brush rotation.
- 6. Remove the brush when it is stationary.

#### Machining parameter adjustments

#### Rotational speed

Brush performance can be optimized by adjusting rotational speed in accordance with brush size, target hole diameter and brush wear. Refer below for recommended rotational speeds.

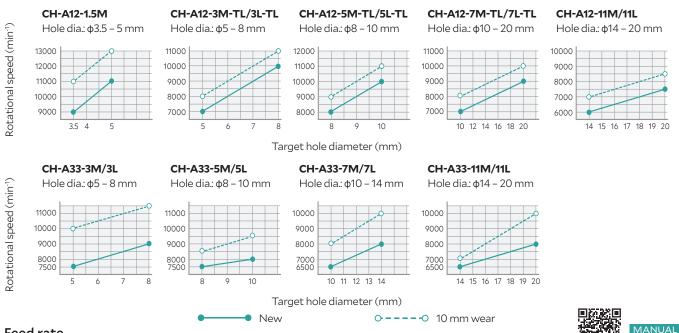

#### Feed rate

300 mm/min

#### **Rotational direction**


Uniform deburring and edge quality can be achieved by rotating the tool in both clockwise and counter-clockwise directions.

# **XEBEC Brush™ Crosshole Extra-Large**

Applicable burr size

Burr thickness ≤ 0.1 mm (Burrs this size can be easily bent by fingernails)

Deburring, cutter mark removal, polishing on inner diameters & counterbores ( $\geq \varphi 20 \text{ mm}$ )









#### Applicable equipment

This tool is used on equipment with rotational speed control (> 4000 min<sup>-1</sup>).









Machining center

Lathe (with live tools)

Dedicated machine

Robot

#### **Tool composition**

Brush and shank are sold separately. Assemble before use.




Shank





#### **Brushes**

| Brush (color)   | Product code | Brush dia.<br>(mm) | Bristle<br>length &<br>(mm) | Shank insertion<br>depth ds<br>(mm) | Max. rotational<br>speed<br>(min <sup>-1</sup> ) | Target hole<br>diameter<br>(mm) | Matching<br>shank | Fig. |
|-----------------|--------------|--------------------|-----------------------------|-------------------------------------|--|---------------------------------|-------------------|------|
|                 | CH-A34-15    | ф15                | 60                          | 10                                  | 9000   | ф20 – 25                        | CH-SH-6           | 7    |
| A34 (dark blue) | CH-A34-20    | ф20                | 60                          | 16                                  | 9000   | ф25 – 30                        | CH-SH-8           | 7    |
|                 | CH-A34-25    | ф25                | 60                          | 16                                  | 9000   | ф30 – 35                        | CH-SH-8           | 7    |




Overall length of assembled brush and shank is 150 mm.

#### **Shanks**

| Product code | Shaft dia. Ds<br>(mm) | Shank length ℓs<br>(mm) | Matching brush       | Fig. |
|--------------|-----------------------|-------------------------|----------------------|------|
| CH-SH-6      | ф6                    | 80                      | CH-A34-15            | 8    |
| CH-SH-8      | ф8                    | 86                      | CH-A34-20, CH-A34-25 | 8    |







80

#### Precautions for use

The shank must be inserted  $\geq$  30 mm in the holder to secure it properly.

The brush will break if:

- used beyond the maximum rotational speed
- used with pneumatic or electric rotary tools
- rotated outside of the bore (outside workpiece)
- used with brush tip < 20 mm inside bore


The brush may break when used with:

• crossholes larger than φ12

Contact XEBEC technical support before using on crossholes >  $\phi$ 12.

## Machining parameters

Brush performance can be optimized by adjusting rotational speed in accordance with brush size, target hole diameter, and brush wear. Refer below for recommended rotational speeds.

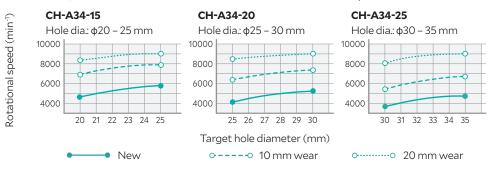

#### Rotational speed:

**Rotational direction:** 

Fig. 8

φDs

7000 min<sup>-1</sup>

Feed rate:

300 mm/min

Uniform deburring and edge quality can be achieved by rotating the tool in both clockwise and counter-

clockwise directions. **Applicable materials:** 

Plastics, nonferrous materials, steel. stainless steel.

Refer to p. 12 for 'How to use'

# **XEBEC Brush™ Crosshole Extra-Long**

Patented

Deburring, cutter mark removal, polishing on bores over  $\phi 150$  mm in depth


( Custom-made item





#### Applicable burr size

Burr thickness ≤ 0.1 mm (Burrs this size can be easily bent by fingernails)



#### Applicable equipment

This tool is used on full cover type equipment with rotational speed control (> 6500 min<sup>-1</sup>).







Machining center

Lathe (with live tools)

Dedicated machine

#### ${\bf Tool\ composition}$

Brush, collar and shank are sold separately. Assemble before use.

#### **Brushes**

| Brush (color) | Product code | Brush diameter (mm) | Shank diameter Ds<br>(mm) | Overall length L<br>(mm) | Maximum<br>rotational speed<br>(min <sup>-1</sup> ) |
|---------------|--------------|---------------------|---------------------------|--------------------------|---|
|               | *            | ф3                  | ф4                        | 400                      | 12000   |
| A12 (red)     | *            | ф5                  | ф6                        | 400                      | 12000   |
| A12 (red)     | *            | ф7                  | ф8                        | 400                      | 12000   |
|               | *            | ф11                 | ф12                       | 400                      | 12000   |
|               | *            | ф3                  | ф4                        | 410                      | 12000   |
| A33 (blue)    | *            | ф5                  | ф6                        | 410                      | 12000   |
| ASS (Diue)    | *            | ф7                  | ф8                        | 410                      | 12000   |
|               | *            | ф11                 | ф12                       | 410                      | 12000   |

- This is a custom-made item. Contact XEBEC technical support for details.
- Brush size is approximate as the tip expands with rotation.

#### Precautions for use

The brush will break if:

- used beyond the maximum rotational speed
- used with pneumatic or electric rotary tools
- rotated outside of the bore (outside workpiece)

The brush may break when used with:

- off-center or angled crossholes
- t-shaped holes, when the secondary bore diameter is > 50 % of the main bore
- crossholes, when the secondary bore diameter is > 25 % of the main bore




# **XEBEC Brush™ Wheel Type**

Deburring, polishing on inner diameters, side walls, and outside diameter threads

#### Applicable burr size

Burr thickness ≤ 0.1 mm (Burrs this size can be easily bent by fingernails)











#### Applicable equipment

This tool can be mounted on equipment shown below.



Machining

center








Lathe (with live tools)

Dedicated machine

Robot

#### **Tool composition**

Brush and shank are sold separately. Assemble before use.



#### **Brushes**

| Brush (color) | Product code | Brush diameter Number of bundles |   | Matching shank | Fig. |
|---------------|--------------|----------------------------------|---|----------------|------|
| A11 (red)     | W-A11-50     | ф50                              | 6 | W-SH-M/L       | 0    |
| ATT (red)     | W-A11-75     | ф75                              | 6 | VV-3H-IVI/L    | 9    |

#### **Shanks**

|   | Product code | Shank diameter Ds (mm) | Shank length \( \ell s \) (mm) | Fig. |
|---|--------------|------------------------|--------------------------------|------|
| ĺ | W-SH-M       | ф8                     | 70                             | 10   |
|   | W-SH-L       | ф12                    | 150                            | 10   |




Fig. 10

#### **Applications**

#### Automation of thread deburring

#### Output shaft



Material: SCM Follows: Turning Tool: W-A11-50


#### **Before**

A file was used to manually deburr the thread but failed to remove all burrs. Quality was unstable.

#### After -

All burrs are removed and quality is stable.

#### Automated deburring of face



Material: S50C Follows: End milling Tool: W-A11-50

#### Before -

Burrs formed on the face were removed manually.


#### After -


Burrs are completely removed inside the machining center.

#### How to use

As shown in the drawing at right, the best approach to removing burrs formed on surface A is to place the center of the brush at a 45-degree angle to the edge. Burrs are removed by rotating the brush both clockwise and counterclockwise.

If this is not possible, position the brush as show at far right. The brush should also be rotated in both clockwise and counter-clockwise directions.





#### Machining parameters

#### Starting parameters

| Product code | Cutting speed | Rotational speed     | Feed per bundle | Depth of cut | Feed     |
|--------------|---------------|----------------------|-----------------|--------------|----------|
| Product code | (m/min)       | (min <sup>-1</sup> ) | (mm/bundle)     | (mm)         | (mm/min) |
| W-A11-50     | 250           | 1600                 | 0.5             | 0.2          | 4800     |
| W-A11-75     | 250           | 1000                 | 0.5             | 0.2          | 3000     |

#### Maximum parameters

| Product code         | Cutting speed (m/min) | Maximum<br>rotational speed<br>(min <sup>-1</sup> ) | Feed per bundle<br>(mm/bundle) | Depth of cut<br>(mm) |
|----------------------|-----------------------|---|--------------------------------|----------------------|
| W-A11-50<br>W-A11-75 | 150 - 350             | 3000  | ≤1.5                           | ≤ 0.5                |

■ Bristle stiffness increases as brushes shorten with wear. Reduce the depth of cut if bristles break.




# **XEBEC Brush™ Turning**

Deburring and polishing on CNC lathes without live tooling

# y unita pononing on or volution management



Burr thickness ≤ 0.1 mm (Burrs this size can be easily bent by fingernails)











#### Applicable equipment



#### **Tool composition**

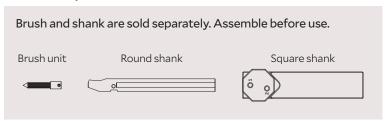

#### **Brushes**

| Brush (color) | Product code | Brush diameter (mm) | Brush length ℓ<br>(mm) | Matching holder                      | Fig. |
|---------------|--------------|---------------------|------------------------|--------------------------------------|------|
|               | A11-TB025    | ф2.5                | 15                     | TM-SH-06                             | 1a   |
| A11 (red)     | A11-TB06     | ф6                  | 30                     | TM-SH-S2020 / TM-SH-S2525 / TM-SH-12 | 1a   |
|               | A11-CB06M    | ф6                  | 30                     | TM-SH-S2020 / TM-SH-S2525            | 1b   |
| A21 (white)   | A21-TB06     | ф6                  | 30                     | TM-SH-S2020 / TM-SH-S2525 / TM-SH-12 | 1a   |
| AZT (White)   | A21-CB06M    | ф6                  | 30                     | TM-SH-S2020 / TM-SH-S2525            | 1b   |
| A 22 (blue)   | A32-TB06     | ф6                  | 30                     | TM-SH-S2020 / TM-SH-S2525 / TM-SH-12 | 1a   |
| A32 (blue)    | A32-CB06M    | ф6                  | 30                     | TM-SH-S2020 / TM-SH-S2525            | 1b   |

■ Holders must be at least 30 mm inside tool blocks and securely fastened.

#### **Round shanks**


| Product code | Length L<br>(mm) | Shank dia.<br>Ds (mm) | Bore size<br>D (mm) | Cutting dia.<br>(mm) | Max. side hole (mm) | Matching brush                 | Fig. |
|--------------|------------------|-----------------------|---------------------|----------------------|---------------------|--------------------------------|------|
| TM-SH-06     | 107              | ф6                    | ≥11                 | ≥ φ12                | <ф3                 | A11-TB025                      | 2    |
| TM-SH-12     | 133              | ф12                   | ≥20                 | ≥ φ21                | No limit            | A11-TB06 / A21-TB06 / A32-TB06 | 2    |


■ Brush angle is fixed.

#### Square shanks

|  | Product code   Length L   Shank h<br>(mm)   Hs (n | Length L | Shank height      | Height | Shank width | Width   | Shank length   | Natahina hurah                    | r:~ |     |                                   |   |
|--|---|----------|-------------------|--------|-------------|---------|----------------|-----------------------------------|-----|-----|-----------------------------------|---|
|  |   | Hs (mm)  | (mm) H (mm) Ws (m |        | W (mm)      | Ls (mm) | Matching brush | Fig.                              |     |     |                                   |   |
|  | TN4 CLL C2020                                     | 12.4     | 20                | 26     | 20          | 24      | 00             | A11-TB06 / A21-TB06 / A32-TB06    | 2   |     |                                   |   |
|  | TM-SH-S2020 124                                   | 124      | 20                | 20     | 20          | 24      | 24 90          | A11-CB06M / A21-CB06M / A32-CB06M | 3   |     |                                   |   |
|  | TM CIT COESE                                      | 134      | 25                | 31     | 25          | 24      | 100            | A11-TB06 / A21-TB06 / A32-TB06    | 2   |     |                                   |   |
|  | TM-SH-S2525                                       | 134      | 25                | 31     | 25          | 25      | 25             | 25                                | 24  | 100 | A11-CB06M / A21-CB06M / A32-CB06M | 3 |


 $\blacksquare$  Brush angle is set by the user. Refer to "How to use: External thread deburring mechanism" for brush angle recommendations.

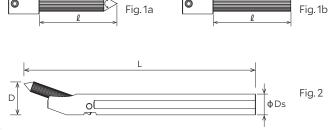

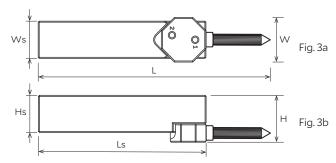

#### Pull the brush, do not push

This is a specialist pull turning and facing tool. Pulling the brush reduces bristle deflection and negotiates discontinuous geometries such as crossholes. The bristles will break if the brush is pushed. The tool must be pulled in the x-axis away from the main spindle when facing and pulled in the z-axis away from the main spindle when ID or OD deburring.

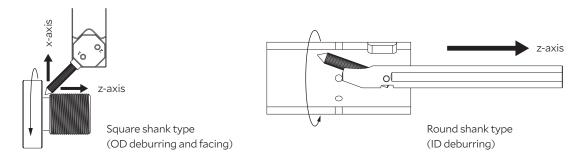


#### Depth of cut (Round shank)

The brush angle of XEBEC Brush Turning Round Shank is fixed at 20 degrees. Maximum depth of cut is 2.0 mm. Usable bristle length varies with the brush diameter.

| Brush diameter (mm) | Brush angle     | Max. usable bristle length |
|---------------------|-----------------|----------------------------|
| ф2.5 (ТВО25)        | 20 dag (Fiyad)  | 3.0 mm                     |
| ф6 (ТВО6)           | 20 deg. (Fixed) | 5.5 mm                     |

#### Brush angle (Square shank)

The square shank has eleven different angles to match the deburring edge. Arrows indicate permissible cutting direction.

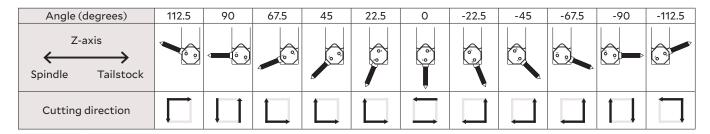

#### Depth of cut (Square shank)

The usable bristle length and maximum depth of cut of the square shank vary with the brush angle. Depth of cut is no more than 2.0 mm. Refer to the following tables for details.

| Brush angle    | М     | ax. usable b | ristle length | l     |
|----------------|-------|--------------|---------------|-------|
| bi usii aligle | Faci  | ng           | OD tu         | rning |
| 90 / 0 deg.    | 15 mm |              | 15 mm         | e     |
| 22.5 deg.      | 5 mm  | et           | 15 mm         | e     |
| 45 deg.        | 15 mm |              | 15 mm         |       |
| 67.5 deg.      | 15 mm | 2 00         | 5 mm          | l l   |
| 112.5 deg.     | 15 mm | l 6 9        | 5 mm          | l o o |

| Brush angle | Max. de | pth of cut |
|-------------|---------|------------|
| brush angle | Facing  | OD turning |
| 90 / 0 deg. | 0.5 mm  | 0.5 mm     |
| 22.5 deg.   | 2.0 mm  | 1.0 mm     |
| 45 deg.     | 1.5 mm  | 1.5 mm     |
| 67.5 deg.   | 1.0 mm  | 2.0 mm     |
| 112.5 deg.  | 1.0 mm  | 2.0 mm     |

■ Refer to "How to use: External thread deburring mechanism" for brush angle recommendations.

#### How to use (cont'd)

#### Crosshole deburring mechanism (Round shank)

A shallow brush angle and large depth of cut are required to remove burrs on crossholes. The pressure exerted on the brush pushes it into a crosshole, with its tapered tip scraping off burrs as the brush is pulled back and out of the hole. If cycle time permits, the workpiece should be rotated both clockwise (CW) and counter-clockwise (CCW) for uniform edge quality.



The maximum crosshole size for the small brush (A11-TB025) is  $\varphi 3$  mm. The bristles of the small brush are stiffer than the larger brush because they are only half the length. This limits the size of crosshole which can be deburred. The large brush (A11-TB06) has no crosshole size restriction.

#### External thread deburring mechanism (Square shank)

A steep brush angle is required to remove burrs on an external thread. The recommended brush angle for deburring the crests is 22.5 degrees. This concentrates most of the grinding power in the tip of the brush, while preventing bristles from being deflected on either side of a crest. Spreading and deflection of the brush results in a loss of grinding power and should be avoided.

| Shank type   | Target edges                         | Brush type     | Brush angle |
|--------------|--------------------------------------|----------------|-------------|
|              | Full thread<br>(incl. start and end) | TB06 (Turning) | 22.5 deg. △ |
| Square shank | Thread<br>(incl. start)              | 1806 (Turning) | 22.5 deg.   |
|              | Thread<br>(start only)               | CB06 (Chamfer) | 45 deg.     |

The workpiece should be rotated clockwise (CW) for a right-hand thread and counter-clockwise (CCW) for a left-hand thread. If the correct rotational direction and brush angle (22.5 deg.) are used, the brush can be pulled easily along the thread. However, the angled brush will catch on the thread and break if the incorrect rotational direction is used.




Rotate the workpiece CW for a right-hand thread. Rotate CCW for a left-hand thread.


### Machining parameters


| Parameter             | Range (same for all sizes) | Starting parameters (same for all sizes) |  |
|-----------------------|----------------------------|--|--|
| Cutting speed (m/min) | 60 - 250                   | 150                                      |  |
| Feed (mm/rev)         | 0.1 - 0.5                  | 0.3                                      |  |
| Double of out (nome)  | 0.5 - 2.0                  | 1.0 (continuous cutting surface)         |  |
| Depth of cut (mm)     | 0.5 - 2.0                  | 0.5 (discontinuous cutting surface)      |  |



- Use on large burrs will greatly increase brush wear and shorten tool life.
- Starting parameters vary depending on the brush angle of the square shank. Refer to the manual for details.







### **Applications**

#### Crosshole deburring



Material: Carbon steel

Main bore diameter: Outer 16 mm, Inner 12 mm

Crosshole diameter: 3 mm

| Brush<br>(color)   | Holder   | Angle (deg.)  | Depth of cut<br>(mm) | Cutting speed (m/min) | Feed rate<br>(mm/rev) | Rotational direction |
|--------------------|----------|---------------|----------------------|-----------------------|-----------------------|----------------------|
| A11-TB025<br>(red) | TM-SH-06 | 20<br>(Fixed) | 1.5                  | 150                   | 0.1                   | CW + CCW             |

#### Thread deburring




Material: Stainless steel

Thread size: 24 x 2 mm

| Brush<br>(color)   | Holder      | Angle (deg.) | Depth of cut<br>(mm) | Cutting speed (m/min) | Feed rate<br>(mm/rev) | Rotational direction |
|--------------------|-------------|--------------|----------------------|-----------------------|-----------------------|----------------------|
| A32-TB06<br>(blue) | TM-SH-S2020 | 22.5         | 0.5                  | 150                   | 0.1                   | CW                   |

#### **Groove polishing**



Material: YXR3 (HRC 60)

| Brush<br>(color)    | Holder     | Angle (deg.) | Depth of cut<br>(mm) | Spindle speed (min <sup>-1</sup> ) |  |
|---------------------|------------|--------------|----------------------|------------------------------------|--|
| A32-CB06M<br>(blue) | TM-SH-2020 | 90           | 1.0                  | 720                                |  |

XEBEC Optional Tools

# **XEBEC Optional Tools**

Reduce the burden of adjusting for brush wear and achieve more consistent deburring and polishing results.





#### XEBEC Floating Holder™

A built-in spring helps to maintain stable load, reducing the frequency of wear offsets and brush protrusion length adjustments.













XEBEC Self-Adjusting Sleeve™

A built-in gear mechanism automatic

protrusion longth raducing human of


A built-in gear mechanism automatically adjusts brush protrusion length, reducing human error and providing consistent machining performance.











#### $XEBEC\ Brush\ Length\ Adjustment\ Tool^{\intercal M}$

A tool for quick in-machine brush length adjustment.



# XEBEC Floating Holder<sup>TM</sup> Straight Shank Type

Patented

Straight Shank Type used with XEBEC Brush Surface (φ6 – 100)

A built-in spring helps to maintain stable load, reducing the frequency of wear offsets and brush protrusion length adjustments.

BT Shank Type used with XEBEC Brush Surface (φ6 – 25)













#### Applicable equipment [Straight Shank Type]

#### This holder can be used on equipment shown below.



Machining

center







Lathe (with live tools)

Dedicated machine


Robot

#### Applicable equipment [BT Shank Type]

This holder can be used with machine tools that are compatible with BT30/40 shanks.

#### Straight Shank Type


| Product code | Matching<br>brush dia.<br>(mm) | Sleeve shank diameter (mm) | Maximum<br>rotational speed<br>(min <sup>-1</sup> ) | Attachments                                   | Fig. |
|--------------|--------------------------------|----------------------------|---|---|------|
|              | ф6                             | φ6 (use with bush 1●)      | 10000   | 1. ф6 bush                                    |      |
| FH-ST12-SL10 | ф15                            | φ6 (use with bush 1●)      | φ6 (use with bush 1●) 6000 2. φ8 bush               |   | 11   |
| FH-5112-5L10 | ф25                            | φ8 (use with bush 2●)      | 5000  | 3. Low-pressure spring ◆ 4. Standard spring ◆ | ''   |
|              | ф40                            | ф10                        | 3000  | 5. High-pressure spring                       |      |
| FH-ST20-60   | ф60                            | ф12                        | 2000 φ12 bush                                       |   | 12   |
| FH-ST20-100  | ф100                           | ф16                        | 1200  | φ16 bush                                      | 12   |




- ♦ Installed when shipped.
- Attachments included when shipped.
- Optional  $\phi$ 3 bush is available.
- Refer to p. 24 for the spring load.

#### **BT Shank Type**

| Product code   Matching brush dia. (mm) |     | Sleeve shank diameter (mm)  | Maximum<br>rotational speed<br>(min <sup>-1</sup> ) | Length under gauge line (mm) | Fig. |
|---|-----|-----------------------------|---|------------------------------|------|
|   | ф6  | φ6 (with φ6 bush <b>O</b> ) | 10000   |                              |      |
| FH-BT30                                 | ф15 | φ6 (with φ6 bush <b>O</b> ) | 6000  | 75                           | 13   |
|   | ф25 | ф8                          | 5000  |                              |      |
|   | ф6  | φ6 (with φ6 bush <b>O</b> ) | 10000   |                              |      |
| FH-BT40                                 | ф15 | φ6 (with φ6 bush <b>O</b> ) | 6000  | 60                           | 14   |
|   | ф25 | ф8                          | 5000  |                              |      |






- O φ6 bush sold separately.
- Refer to p. 24 for the spring load.

#### Precautions for use

- Lower the tool vertically onto the workpiece.
- The tool cannot be used on surfaces that are discontinuous or have protrusions.
- · The tool may not function correctly on a horizontal machining center when spring load is low.


#### Mechanism

This tool has a built-in spring. The spring is compressed when the brush contacts the workpiece surface.

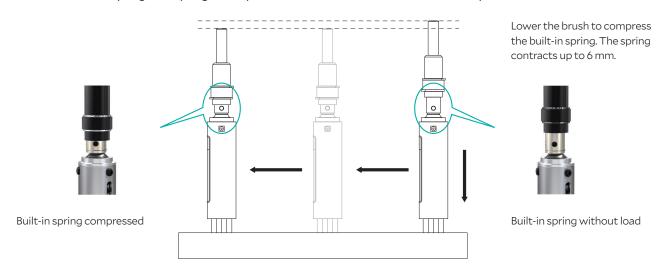

#### How to use

#### Product in use



The diagram to the left shows how to use the tool effectively.

- 1. Approach the workpiece surface from above without rotating the brush.
- 2. Set the depth of cut and compress the spring.
- 3. Rotate the brush and start feeding with the spring compressed.
- 4. Stop rotation and feed when finished machining.
- 5. Remove the brush upward from the workpiece surface.

#### Unacceptable workpiece shapes



Avoid cavities and protrusions to ensure proper operation of the floating mechanism.

#### FH-ST12-SL10 spring specifications

| Spring type                           | Outer diameter | Spring constant<br>(N/mm) | Overall length (mm) | Load by stroke<br>(N) |      |
|---------------------------------------|----------------|---------------------------|---------------------|-----------------------|------|
|                                       | (mm)           | (IN/IIIIII)               | (11111)             | 0 mm                  | 6 mm |
| Standard spring (installed)           | ф10            | 0.30                      | 40                  | 4.5                   | 6.3  |
| Low-pressure spring (attachment)      | ф10            | 0.30                      | 30                  | 1.5                   | 3.3  |
| High-pressure spring (attachment)     | ф10            | 0.55                      | 38                  | 7.7                   | 11.0 |
| Maximum load spring (sold separately) | ф10            | 3.03                      | 30                  | 15.2                  | 33.4 |

#### FH-ST20-60/100 and FH-BT30/40 load adjustment

| Load adjustment |      | v stroke<br>N) | Load adjustment screw position                      |  |
|-----------------|------|----------------|---|--|
|                 | 0 mm | 6 mm           |   |  |
| Standard float  | 2    | 6              | When load adjustment screw is flush with shaft end. |  |
| Higher float    | 6    | 10             | When load adjustment screw is fully inside shaft.   |  |



# XEBEC Self-Adjusting Sleeve<sup>TM</sup> (Patented)



A built-in gear mechanism automatically adjusts brush protrusion length, reducing human error and providing consistent machining performance.





#### Applicable equipment

This tool is used on equipment capable of precise angular control of the sleeve.








Machining center

Dedicated machine

Robot


#### **Tool composition**

Consists of a sleeve and rack gear. Brushes are sold separately.



#### **Sleeves**


| Product code | Matching brush | Sleeve<br>outer dia. Dc<br>(mm) | Maximum<br>outer dia. Df<br>(mm) | Shank<br>diameter Ds<br>(mm) | Overall<br>length L<br>(mm) | Shank<br>length ls<br>(mm) | Main body<br>mass<br>(g) | Maximum<br>rotational<br>speed<br>(min <sup>-1</sup> ) | Fig. |
|--------------|----------------|---------------------------------|----------------------------------|------------------------------|-----------------------------|----------------------------|--------------------------|--|------|
|              | A13-CB06M      |                                 | ф37                              |                              |                             | 35.0                       | 220                      |  |      |
| XP-AUT06M    | A11-CB06M      | ф14.2                           |                                  | ф10                          | 124.1                       |                            |                          | 10000  | 15   |
| AP-AUTUOIVI  | A21-CB06M      | Ψ14.2                           |                                  |                              |                             |                            |                          | 10000  | 15   |
|              | A32-CB06M      |                                 |                                  |                              |                             |                            |                          |  |      |
|              | A13-CB15M      |                                 | ф37                              | ф10                          | 136.3                       | 35.0                       | 270                      | 6000   |      |
| XP-AUT15M    | A11-CB15M      | ф23.4                           |                                  |                              |                             |                            |                          |  | 15   |
| AP-AUT ISIVI | A21-CB15M      |                                 |                                  |                              |                             |                            |                          |  | 15   |
|              | A32-CB15M      |                                 |                                  |                              |                             |                            |                          |  |      |
|              | A11-CB25M      |                                 |                                  |                              |                             |                            |                          |  |      |
| XP-AUT25M    | A21-CB25M      | ф34.6                           | ф60                              | ф16                          | 189.0                       | 41.5                       | 795                      | 5000   | 15   |
|              | A32-CB25M      |                                 |                                  |                              |                             |                            |                          |  |      |
|              | A11-CB40M      |                                 |                                  |                              | 189.0                       | 41.5                       |                          |  |      |
| XP-AUT40M    | A21-CB40M      | ф50.0                           | ф60                              | ф16                          |                             |                            | 910                      | 3000   | 15   |
|              | A32-CB40M      |                                 |                                  |                              |                             |                            |                          |  |      |

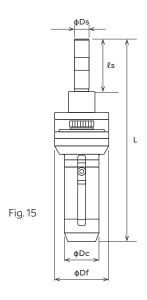

#### How to use

Mount the rack gear inside the machine.

The brush protrusion length is adjusted by rotating the side gear built inside the sleeve with the rack gear.

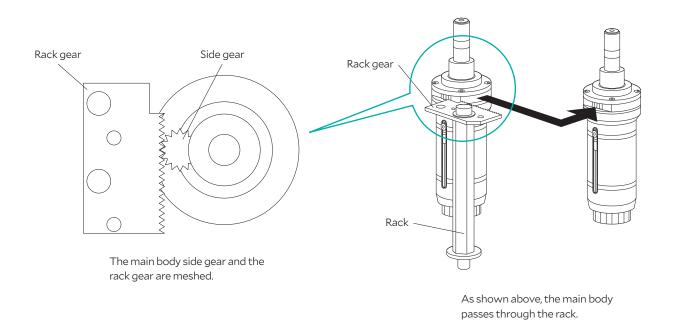

#### Brush protrusion length

The brush protrusion length can be adjusted in increments of 0.05 mm.

It is possible to make an adjustment of up to 1 mm in a single pass. This allows adjustments to be made at a predetermined interval corresponding to tool wear.



#### **XEBEC Short BT Holder™**

Compact tool holder whose length under the gauge line is 23.5 mm (including bush flange thickness 1.5 mm). Optimal when space is limited.

Used with XEBEC Brush Surface XEBEC Self-Adjusting Sleeve XEBEC Floating Holder


■ Only for use with XEBEC tools



#### Applicable equipment

This tool can be used with machine tools that are compatible with BT30 shanks.

#### **Tool outline**

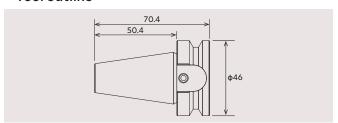


# **XEBEC Brush Length Adjustment Tool™**

A tool for quick in-machine brush length adjustment.

| Product code | Matching brush diameter      | Built-in hexagonal wrench size |  |  |
|--------------|------------------------------|--------------------------------|--|--|
| Product code | (mm)                         | (mm)                           |  |  |
| XP-EZ-001    | φ15 / φ25 / φ40 / φ60 / φ100 | 1.5, 2.0                       |  |  |

#### How to use


- Move the brush rest using the adjustment knob to set the amount of brush protrusion.
- Tighten the fixing nut.
- Hold the unit in one hand and align the sleeve rest with the sleeve end.
- Loosen the adjustment screw on the sleeve to allow the bristles to drop to the brush rest.
- Tighten the adjustment screw to secure the brush in place.

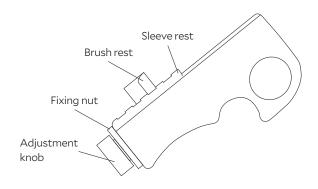



XEBEC Brush Surface (φ15 - 100)

#### **MEMO**

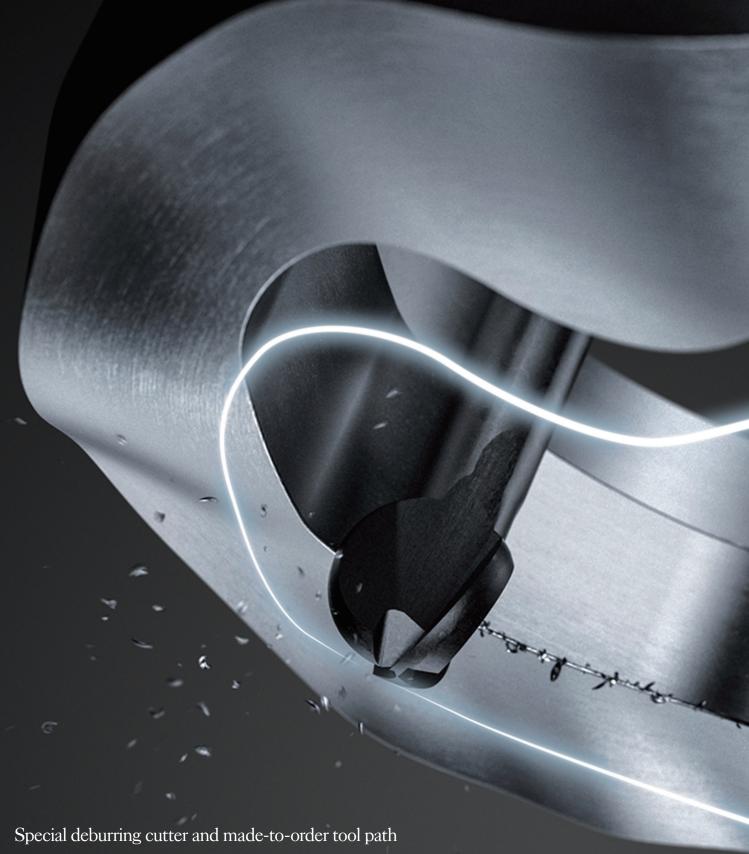

# XEBEC Back Burr Cutter and Deburring Tool Path<sup>TM</sup>

"There must be a way to automate crosshole deburring!"

Our efforts to automate deburring made us aware of other problems requiring innovative solutions. We started developing a means to remove somewhat larger burrs from the edges of complex shaped workpieces, without scratching adjacent surfaces. The result was a product that combines optimal tool geometry for deburring with tool paths that inhibit burr formation. It was also symbolic of our approach to development—drawing from whatever field necessary to solve a problem.


A solution combining a made-to-order tool path program with a dedicated cutting tool for high quality finish, extended tool life and the world's fastest automated deburring of drill holes. The ready-to-use CNC program is easy to install and greatly reduces programming time.

#### **XEBEC Back Burr Cutter**

This cutter is made of micro-grain cemented carbide for longer life. It is heat-resistant with a AlTiCrN coating and can be used with a wide range of materials including non-ferrous metals, such as aluminum alloy, and heat-sensitive materials such as titanium. Cutting performance is improved through optimal blade geometry that inhibits formation of secondary burrs.

#### **XEBEC Deburring Tool Path**

Made-to-order CNC tool path program



## High quality


An optimized tool path and use of the ideal approach angle enables uniform break width on edges, while inhibiting formation of secondary burrs.



Five different tool paths provide a choice of edge break widths. (Refer to p. 33 for cutter diameters and corresponding edge break widths.)

#### Long tool life

Tool life is increased by continuous displacement of the cutter contact point.

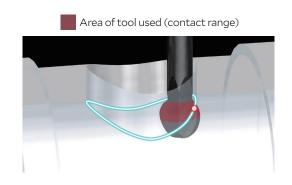

#### World's fastest deburring

Cycle time is reduced because there is no wasted motion in the cutter path. Cycle time is up 10 times faster than conventional deburring tools.

# Deburring tool comparison 12 10 (S) 8 8 12 10 10 (S) 8 8 10 10 (S) 8 8 10 10 (S) 8 8 10 (S) 10 (S) 10 (S) 8 10 (S) 10


#### **XEBEC Back Burr Cutter™**

Ideal for deburring both front and back of drilled holes.



#### Applicable burr size

Burr thickness  $\leq$  0.2 mm (Burrs this size can be bent by fingernails)





This tool is used on equipment with 3-axis simultaneous control.





Machining center

Lathe (with live tools)

#### **Tool composition**

Consists of a spherical deburring cutter and made-to-order tool path. Refer to p. 33 - 34 for information on the made-to-order tool path (CNC machining program).

#### AlTiCrN coated P: Steel M: Stainless steel K: Cast iron S: Heat-resistant super alloy N: Non-ferrous metal

| Туре     | Product code | Cutter dia. Dc | Cutter rad. R | Neck dia. dn | _    | Overall length L1 | Shank dia. Ds | Number of | Fig. |
|----------|--------------|----------------|---------------|--------------|------|-------------------|---------------|-----------|------|
| .71      |              | (mm)           | (mm)          | (mm)         | (mm) | (mm)              | (mm)          | blades    |      |
|          | XC-08-AS-3F  | ф0.8           | 0.40          | ф0.48        | 3.0  | 60                | ф3.0          | 3         | 16   |
|          | XC-13-AS-3F  | ф1.3           | 0.65          | ф0.78        | 5.0  | 60                | ф3.0          | 3         | 16   |
|          | XC-18-AS-3F  | ф1.8           | 0.90          | ф1.10        | 6.0  | 60                | ф3.0          | 3         | 16   |
|          | XC-23-AS-3F  | ф2.3           | 1.15          | ф1.40        | 7.5  | 70                | ф3.0          | 3         | 16   |
|          | XC-28-AS-3F  | ф2.8           | 1.40          | ф1.70        | 9.0  | 70                | φ4.0          | 3         | 16   |
| Short    | XC-33-AS-3F  | ф3.3           | 1.65          | ф2.00        | 10.5 | 70                | φ4.0          | 3         | 16   |
|          | XC-38-AS-3F  | ф3.8           | 1.90          | ф2.40        | 12.0 | 70                | φ4.0          | 3         | 16   |
|          | XC-48-AS-3F  | ф4.8           | 2.40          | ф3.00        | 15.0 | 70                | ф6.0          | 3         | 16   |
|          | XC-58-AS-3F  | ф5.8           | 2.90          | ф3.50        | 18.0 | 70                | ф6.0          | 3         | 16   |
|          | XC-78-AS-3F  | ф7.8           | 3.90          | ф4.70        | 24.0 | 100               | Ф8.0          | 3         | 16   |
|          | XC-98-AS-3F  | ф9.8           | 4.90          | ф5.90        | 30.0 | 120               | ф10.0         | 3         | 16   |
|          | XC-08-A      | ф0.8           | 0.40          | ф0.48        | 5.0  | 60                | ф3.0          | 2         | 16   |
|          | XC-13-A      | ф1.3           | 0.65          | ф0.78        | 8.0  | 60                | ф3.0          | 2         | 16   |
|          | XC-18-A      | ф1.8           | 0.90          | ф1.10        | 10.0 | 60                | ф3.0          | 2         | 16   |
|          | XC-23-A      | ф2.3           | 1.15          | ф1.40        | 12.5 | 70                | ф3.0          | 2         | 16   |
|          | XC-28-A      | ф2.8           | 1.40          | ф1.70        | 15.0 | 70                | φ4.0          | 2         | 16   |
| Regular  | XC-33-A      | ф3.3           | 1.65          | ф2.00        | 17.5 | 70                | φ4.0          | 2         | 16   |
|          | XC-38-A      | ф3.8           | 1.90          | ф2.40        | 20.0 | 70                | φ4.0          | 2         | 16   |
|          | XC-48-A      | ф4.8           | 2.40          | ф3.00        | 25.0 | 70                | ф6.0          | 2         | 16   |
|          | XC-58-A      | ф5.8           | 2.90          | ф3.50        | 30.0 | 70                | ф6.0          | 2         | 16   |
|          | XC-78-A      | ф7.8           | 3.90          | ф4.70        | 40.0 | 100               | φ8.0          | 3         | 16   |
|          | XC-98-A      | ф9.8           | 4.90          | ф5.90        | 50.0 | 120               | ф10.0         | 3         | 16   |
|          | XC-18-B      | ф1.8           | 0.90          | ф1.10        | _    | 50                | ф1.1          | 2         | 17   |
|          | XC-23-B      | ф2.3           | 1.15          | ф1.40        | _    | 60                | ф1.4          | 2         | 17   |
|          | XC-28-B      | ф2.8           | 1.40          | ф1.70        | _    | 70                | ф1.7          | 2         | 17   |
|          | XC-33-B      | ф3.3           | 1.65          | ф2.00        | _    | 80                | ф2.0          | 2         | 17   |
| Straight | XC-38-B      | ф3.8           | 1.90          | ф2.40        | _    | 85                | ф2.4          | 2         | 17   |
|          | XC-48-B      | ф4.8           | 2.40          | ф3.00        | _    | 105               | ф3.0          | 2         | 17   |
|          | XC-58-B      | ф5.8           | 2.90          | ф3.50        | _    | 120               | ф3.5          | 2         | 17   |
|          | XC-78-B      | ф7.8           | 3.90          | ф4.70        | _    | 150               | ф4.7          | 3         | 17   |
|          | XC-98-B      | ф9.8           | 4.90          | ф5.90        | _    | 180               | ф5.9          | 3         | 17   |

#### Uncoated N: Non-ferrous metal O: Resin

| Type    | Product code | Cutter dia. Dc | Cutter rad. R | Neck dia. dn | Neck length L2 | Overall length L1 | Shank dia. Ds | Number of | Fig. |
|---------|--------------|----------------|---------------|--------------|----------------|-------------------|---------------|-----------|------|
| Туре    | Product code | (mm)           | (mm)          | (mm)         | (mm)           | (mm)              | (mm)          | blades    | rig. |
|         | XC-08-A-N    | ф0.8           | 0.40          | ф0.48        | 5.0            | 60                | ф3            | 2         | 16   |
|         | XC-13-A-N    | ф1.3           | 0.65          | ф0.78        | 8.0            | 60                | ф3            | 2         | 16   |
|         | XC-18-A-N    | ф1.8           | 0.90          | ф1.10        | 10.0           | 60                | ф3            | 2         | 16   |
|         | XC-23-A-N    | ф2.3           | 1.15          | ф1.40        | 12.5           | 70                | ф3            | 2         | 16   |
|         | XC-28-A-N    | ф2.8           | 1.40          | ф1.70        | 15.0           | 70                | ф4            | 2         | 16   |
| Regular | XC-33-A-N    | ф3.3           | 1.65          | ф2.00        | 17.5           | 70                | ф4            | 2         | 16   |
|         | XC-38-A-N    | ф3.8           | 1.90          | ф2.40        | 20.0           | 70                | ф4            | 2         | 16   |
|         | XC-48-A-N    | ф4.8           | 2.40          | ф3.00        | 25.0           | 70                | ф6            | 2         | 16   |
|         | XC-58-A-N    | ф5.8           | 2.90          | ф3.50        | 30.0           | 70                | ф6            | 2         | 16   |
|         | XC-78-A-N    | ф7.8           | 3.90          | ф4.70        | 40.0           | 100               | ф8            | 3         | 16   |
|         | XC-98-A-N    | ф9.8           | 4.90          | ф5.90        | 50.0           | 120               | ф10           | 3         | 16   |

#### **Applications**

#### Automation of deburring

#### Valve



Material: Free cutting steel Follows: Drilling Tool: XC-18-A

#### Before

Deburring was done in 3 steps (φ2 zero cut, nylon brush deburring, φ3 zero cut), with a different tool for each. This resulted in a long cycle time.

#### After -

Deburring is performed with a single cutter. Cycle time is 9 seconds shorter and tool cost is reduced.

#### Automation of deburring

#### Industrial robot part



Material: SUS304 Follows: Tapping Tool: XC-18-A

#### Before -

A lengthy manual deburring was followed by a tap zero cut and air blow. This resulted in a very long cycle time.


#### After


XEBEC deburring tool path reduces the deburring time from 120 to 40 seconds. The workplace is safer as manual deburring is no longer used.

#### Starting parameters

#### AlTiCrN coated

P: Steel M: Stainless steel K: Cast iron S: Heat-resistant super alloy N: Non-ferrous metal

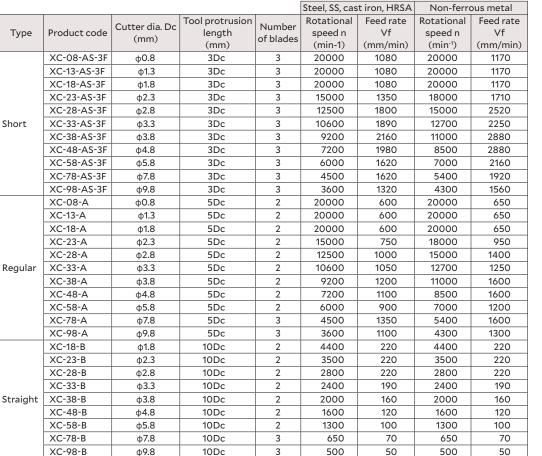



#### Precautions for use

- XEBEC Back Burr Cutter is designed for CNC machines. Never use it as a hand tool.
- Turning on advanced preview control on the machine tool results in uniform edges.
- The machining error on holes must be kept as small as possible.



MANUAL

#### Uncoated

N: Non-ferrous metal O: Resin

| Туре    | Product code | Cutter dia. Dc<br>(mm) | Tool protrusion<br>length<br>(mm) | Number<br>of blades | Rotational<br>speed n<br>(min <sup>-1</sup> ) | Feed rate<br>Vf<br>(mm/min) |
|---------|--------------|------------------------|-----------------------------------|---------------------|---|-----------------------------|
|         | XC-08-A-N    | ф0.8                   | 5Dc                               | 2                   | 20000   | 650                         |
|         | XC-13-A-N    | ф1.3                   | 5Dc                               | 2                   | 20000   | 650                         |
|         | XC-18-A-N    | ф1.8                   | 5Dc                               | 2                   | 20000   | 650                         |
|         | XC-23-A-N    | ф2.3                   | 5Dc                               | 2                   | 18000   | 950                         |
|         | XC-28-A-N    | ф2.8                   | 5Dc                               | 2                   | 15000   | 1400                        |
| Regular | XC-33-A-N    | ф3.3                   | 5Dc                               | 2                   | 12700   | 1250                        |
|         | XC-38-A-N    | ф3.8                   | 5Dc                               | 2                   | 11000   | 1600                        |
|         | XC-48-A-N    | ф4.8                   | 5Dc                               | 2                   | 8500  | 1600                        |
|         | XC-58-A-N    | ф5.8                   | 5Dc                               | 2                   | 7000  | 1200                        |
|         | XC-78-A-N    | ф7.8                   | 5Dc                               | 3                   | 5400  | 1600                        |
|         | XC-98-A-N    | ф9.8                   | 5Dc                               | 3                   | 4300  | 1300                        |


#### Parameter adjustments

- · Machining parameters will vary for the straight type when protrusion lengths other than 10D (shown in table) are used.
- · Rotational speed and feed rates shown are intended as guides for setting starting parameters.
- In the event of abnormal vibration or noise, reduce the rotational speed and feed rate proportionally.
- If the maximum rotational speed and feed of the machine is below the starting parameters, reduce them both proportionally to the machine's capability.

# **XEBEC Deburring Tool Path<sup>TM</sup>** (Patented)



An integral component of this deburring solution, XEBEC Deburring Tool Path is a made-to-order CNC tool path program that ensures optimal performance of the XEBEC Back Burr Cutter.




crosshole


#### Standard paths

crosshole

Standard paths are readily available for the commonly encountered crosshole configurations shown below.

The same cutter can be used for many different types and sizes of hole. This reduces the number of tools in the ATC and the cycle time.

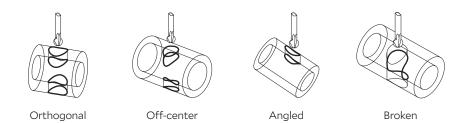



Deburring amount and allowable cumulative error

crosshole


| Product code        | Cutter dia. Dc | Edge break length<br>(mm) |      |      |                  |      | Max. allowed accumulated |
|---------------------|----------------|---------------------------|------|------|------------------|------|--------------------------|
| Froduct code        | (mm)           | 1 2 3 4                   | 4    | 5    | variance<br>(mm) |      |                          |
| XC-08-AS-3F/A/A-N   | Ф0.8           | 0.02                      | 0.04 | 0.06 | 0.08             | 0.10 | 0.03                     |
| XC-13-AS-3F/A/A-N   | ф 1.3          | 0.04                      | 0.06 | 0.08 | 0.10             | 0.12 | 0.05                     |
| XC-18-AS-3F/A/B/A-N | ф1.8           | 0.07                      | 0.09 | 0.11 | 0.13             | 0.15 | 0.08                     |
| XC-23-AS-3F/A/B/A-N | ф2.3           | 0.07                      | 0.09 | 0.11 | 0.13             | 0.15 | 0.09                     |
| XC-28-AS-3F/A/B/A-N | ф2.8           | 0.08                      | 0.11 | 0.14 | 0.17             | 0.20 | 0.10                     |
| XC-33-AS-3F/A/B/A-N | ф3.3           | 0.08                      | 0.11 | 0.14 | 0.17             | 0.20 | 0.11                     |
| XC-38-AS-3F/A/B/A-N | ф3.8           | 0.09                      | 0.13 | 0.17 | 0.21             | 0.25 | 0.12                     |
| XC-48-AS-3F/A/B/A-N | ф4.8           | 0.10                      | 0.15 | 0.20 | 0.25             | 0.30 | 0.15                     |
| XC-58-AS-3F/A/B/A-N | ф5.8           | 0.10                      | 0.15 | 0.20 | 0.25             | 0.30 | 0.18                     |
| XC-78-AS-3F/A/B/A-N | ф7.8           | 0.10                      | 0.15 | 0.20 | 0.25             | 0.30 | 0.18                     |
| XC-98-AS-3F/A/B/A-N | ф9.8           | 0.10                      | 0.15 | 0.20 | 0.25             | 0.30 | 0.18                     |

crosshole

#### Standard path for tapped holes


| Tap size | Matching cutter product code | Cutter dia. Dc<br>(mm) | Deburring<br>amount<br>(mm) |
|----------|------------------------------|------------------------|-----------------------------|
| M3       | XC-23-AS-3F/A/B/A-N          | ф2.3                   | 0.11                        |
| M4       | XC-28-AS-3F/A/B/A-N          | ф2.8                   | 0.14                        |
| M5       | XC-33-AS-3F/A/B/A-N          | ф3.3                   | 0.14                        |
| M6       | XC-38-AS-3F/A/B/A-N          | ф3.8                   | 0.17                        |
| M8       | XC-48-AS-3F/A/B/A-N          | ф4.8                   | 0.20                        |
| M10      | XC-58-AS-3F/A/B/A-N          | ф5.8                   | 0.20                        |
| M12      | XC-78-AS-3F/A/B/A-N          | ф7.8                   | 0.20                        |
| M16 - 24 | XC-98-AS-3F/A/B/A-N          | ф9.8                   | 0.20                        |

Standard paths are available for thread sizes from M3 to M24.




#### **XEBEC Deburring Tool Path All Edges**


A customized tool path for extremely complex edge profiles.






























#### How to order standard paths

A made-to-order tool path for commonly encountered crosshole configurations.

#### STEP1

#### Free assessment

You check whether the XEBEC Back Burr Cutter and Deburring Tool Path can be used with your workpiece and machine. The result is available immediately.

#### STEP 2

#### Quotation

You receive a quotation by submitting your contact information.

#### STEP 3

#### Order

Send your order to the XEBEC distributor in your region after confirming the details.

#### **Online Application Form**

All you need to do is to enter a few dimensions including hole diameters and to specify the orientation of the workpiece inside the machine.

Visit the special website below to conduct a self-assessment and submit a request for quotation.

https://xebec-backburr-cutter.com

#### Ordering XEBEC Deburring Tool Path All Edges

Please contact XEBEC directly to request XEBEC Deburring Tool Path All Edges, a customized solution for deburring paths which to do not belong to the six standard types shown on p. 33.



#### Burrless chamfering with the world's first V-shaped blade

# XEBEC Burrless Chamfering Cutter<sup>TM</sup>

"Let's make a chamfering tool that only XEBEC would think of."

At the time, we were looking for additional ways to automate the deburring process and reduce the burden on users. The tools we offered could not provide an exact chamfer. In many cases, users had to alter break edge instructions on drawings to permit edge blending. After much consideration, we came up with the concept of a chamfering tool that does not produce secondary burrs. And settled on the world's first V-shaped blades as the optimal choice for this best-in-category tool.



The unique V-shaped blades eliminate the need for deburring after chamfering, reducing man-hours required for deburring, the cost of tools, and machining times.




## **Reduction of deburring man-hours**

The world's first V-shaped blades (patented) chamfer without creating secondary burrs, eliminating the need for deburring after chamfering.



## **Reduction of tool costs**

This cutter has twice the tool life of conventional chamfering tools.

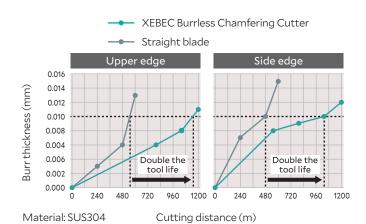

## **Reduced machining times**

The multi-blade design enables high feed rates for reduced machining time.



## Flat tip

Flat tool tip prevents rounding and chipping of the tool tip, reducing tool length measurement errors and improving machining positional accuracy.



## **XEBEC Burrless Chamfering Cutter<sup>TM</sup>** (Patented)



Burrless chamfering with world's first V-shaped blade




## Applicable equipment




| AlTiCrN c    | oated P:St                              | teel M: Stainles               | ss steel K: Cast             | S: Heat-re             | esistant super al                       | lloy N: Non-fei                 | rrous metal      |                            |      |
|--------------|---|--------------------------------|------------------------------|------------------------|---|---------------------------------|------------------|----------------------------|------|
| Product code | Chamfer<br>alignment dia.<br>Dc<br>(mm) | Shank diameter<br>Dcon<br>(mm) | Overall length<br>LF<br>(mm) | Neck length L1<br>(mm) | Maximum<br>depth of cut<br>APMX<br>(mm) | Cutting angle<br>KAPR<br>(deg.) | Number of blades | Chamfering<br>size<br>(mm) | Fig. |
| XC-C-03-M    | ф2                                      | ф6                             | 50                           | 5                      | 1                                       | 45                              | 3                | C0.3 - C0.6                | 18   |
|              |   |                                |                              | i                      |   |                                 |                  |                            |      |

| Product code | Chamfer<br>alignment dia.<br>Dc<br>(mm) | Shank diameter<br>Dcon<br>(mm) | Overall length<br>LF<br>(mm) | Neck length L1<br>(mm) | Maximum<br>depth of cut<br>APMX<br>(mm) | Cutting angle<br>KAPR<br>(deg.) | Number of blades | Chamfering<br>size<br>(mm) | Fig. |
|--------------|---|--------------------------------|------------------------------|------------------------|---|---------------------------------|------------------|----------------------------|------|
| XC-C-03-M    | ф2                                      | ф6                             | 50                           | 5                      | 1                                       | 45                              | 3                | C0.3 - C0.6                | 18   |
| XC-C-06-M    | ф4                                      | ф6                             | 60                           | _                      | 2                                       | 45                              | 4                | C0.7 - C1.5                | 19   |
|              |   |                                |                              |                        |   |                                 |                  |                            |      |

| Uncoated     | N: N                                    | N: Non-ferrous metal O: Resin  |                              |                        |   |                                 |                  |                            |      |  |
|--------------|---|--------------------------------|------------------------------|------------------------|---|---------------------------------|------------------|----------------------------|------|--|
| Product code | Chamfer<br>alignment dia.<br>Dc<br>(mm) | Shank diameter<br>Dcon<br>(mm) | Overall length<br>LF<br>(mm) | Neck length L1<br>(mm) | Maximum<br>depth of cut<br>APMX<br>(mm) | Cutting angle<br>KAPR<br>(deg.) | Number of blades | Chamfering<br>size<br>(mm) | Fig. |  |
| XC-C-03-N    | ф2                                      | ф6                             | 50                           | 5                      | 1                                       | 45                              | 3                | C0.3 - C0.6                | 18   |  |
| XC-C-06-N    | ф4                                      | ф6                             | 60                           | _                      | 2                                       | 45                              | 4                | C0.7 - C1.5                | 19   |  |

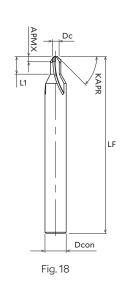


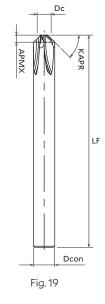

## **Applications**

## Automation of chamfering

## Cooling water pipe block



Material: SUS304 Follows: Drilling Tool: XC-C-06-M

Burrs were formed when chamfering. Manual deburring was required.

#### After -

Shortened the chamfering time. Manual deburring is no longer required after chamfering.

## Automation of chamfering

## Machine tool jig



Material: S50C Follows: End milling Tool: XC-C-06-M

#### Before -


Oil stone was used to remove burrs after chamfering. However, it scarred the surface.

#### After

Oil stone is no longer needed and quality is improved.

## How to use


Position the chamfering alignment diameter at the chamfering center point of the workpiece.

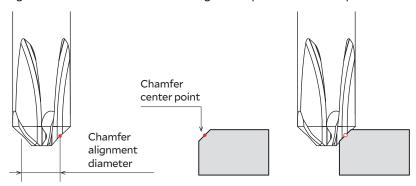

## Machining parameters

### Offsets

| Product code | Chamfering size (mm) | Offsets<br>(mm) |      |  |
|--------------|----------------------|-----------------|------|--|
|              | (11111)              | Α               | В    |  |
|              | C0.3                 | 0.85            | 0.65 |  |
| XC-C-03-M/N  | C0.4                 | 0.80            | 0.70 |  |
| XC-C-03-W/N  | C0.5                 | 0.75            | 0.75 |  |
|              | C0.6                 | 0.70            | 0.80 |  |
|              | C0.7                 | 1.65            | 1.35 |  |
|              | C0.8                 | 1.60            | 1.40 |  |
|              | C0.9                 | 1.55            | 1.45 |  |
|              | C1.0                 | 1.50            | 1.50 |  |
| XC-C-06-M/N  | C1.1                 | 1.45            | 1.55 |  |
|              | C1.2                 | 1.40            | 1.60 |  |
|              | C1.3                 | 1.35            | 1.65 |  |
|              | C1.4                 | 1.30            | 1.70 |  |
|              | C1.5                 | 1.25            | 1.75 |  |



## Starting parameters

| Product code | Workpiece       | Cutting speed | Rotational speed     | Feed rate | Feed per tooth |
|--------------|-----------------|---------------|----------------------|-----------|----------------|
| Product code | material        | (m/min)       | (min <sup>-1</sup> ) | (mm/min)  | (mm/t)         |
|              | Steel           | 60 - 100      | 12000                | 1800      | 0.05           |
| XC-C-03-M    | Stainless steel | 40 - 80       | 9000                 | 1350      | 0.05           |
| XC-C-03-IVI  | 64 titanium     | 45 - 60       | 8000                 | 1200      | 0.05           |
|              | Inconel         | 20 - 30       | 4000                 | 600       | 0.05           |
| XC-C-03-N    | Aluminum alloy  | 200 - 300     | 40000                | 6000      | 0.05           |
| XC-C-03-IN   | Resin           | 60 - 100      | 12000                | 1800      | 0.05           |
|              | Steel           | 60 - 100      | 6300                 | 1260      | 0.05           |
| XC-C-06-M    | Stainless steel | 40 - 80       | 4800                 | 960       | 0.05           |
| XC-C-00-IVI  | 64 titanium     | 45 - 60       | 4000                 | 800       | 0.05           |
|              | Inconel         | 20 - 30       | 2000                 | 400       | 0.05           |
| XC-C-06-N    | Aluminum alloy  | 200 - 300     | 20000                | 4000      | 0.05           |
| AC-C-00-IN   | Resin           | 60 - 100      | 6300                 | 1760      | 0.07           |





XEBEC Ceramic Stone TM




## XEBEC Stone<sup>TM</sup> Flexible Shaft (Patented)

Deburring and polishing front and back of crossholes, grooves and areas deep inside the workpiece. The spring steel shaft absorbs vibrations for a soft surface contact.

#### Applicable burr size

Burr thickness  $\leq$  0.2 mm (Burrs this size can be bent by fingernails)





## Applicable equipment

This tool is used on equipment with rotational speed control.











Machining center

Lathe (with live tools)

Dedicated machine

Robot

Rotary tool (electric)

## Ball type

| Equivalent |              | Head | Shaft | Shank | Overall  | Standard                   | Maximum                    |      |
|------------|--------------|------|-------|-------|----------|----------------------------|----------------------------|------|
| grit       | Product code | size | dia.  | dia.  | length L | rotational                 | rotational                 | Fig. |
| (color)    |              | (mm) | (mm)  | (mm)  | (mm)     | speed (min <sup>-1</sup> ) | speed (min <sup>-1</sup> ) |      |
|            | CH-PB-3B     | ф3   | ф1.5  | ф3.0  | 71.5     | 5000 - 8000                | 15000                      | 20   |
| #800       | CH-PB-4B     | ф4   | ф1.5  | ф3.0  | 72.0     | 5000 - 8000                | 13000                      | 20   |
| (blue)     | CH-PB-5B     | ф5   | ф1.5  | ф3.0  | 72.5     | 5000 - 8000                | 12000                      | 20   |
|            | CH-PB-6B     | ф6   | ф1.5  | ф3.0  | 73.0     | 5000 - 8000                | 10000                      | 20   |
|            | CH-PO-3B     | ф3   | ф1.5  | ф3.0  | 71.5     | 5000 - 8000                | 15000                      | 20   |
| #400       | CH-PO-4B     | ф4   | ф1.5  | ф3.0  | 72.0     | 5000 - 8000                | 13000                      | 20   |
| (orange)   | CH-PO-5B     | ф5   | ф1.5  | ф3.0  | 72.5     | 5000 - 8000                | 12000                      | 20   |
|            | CH-PO-6B     | ф6   | ф1.5  | ф3.0  | 73.0     | 5000 - 8000                | 10000                      | 20   |
|            | CH-PM-3B     | ф3   | ф1.5  | ф3.0  | 71.5     | 5000 - 8000                | 15000                      | 20   |
|            | CH-PM-4B     | ф4   | ф1.5  | ф3.0  | 72.0     | 5000 - 8000                | 13000                      | 20   |
|            | CH-PM-5B     | ф5   | ф1.5  | ф3.0  | 72.5     | 5000 - 8000                | 12000                      | 20   |
|            | CH-PM-6B     | ф6   | ф1.5  | ф3.0  | 73.0     | 5000 - 8000                | 10000                      | 20   |
| #220       | CH-PM-10B    | ф10  | ф1.5  | ф3.0  | 75.0     | 4000 - 5000                | 6000                       | 20   |
| (gray)     | CH-PM-3B-L   | ф3   | ф1.5  | ф3.0  | 71.5     | _                          | 1000                       | 20   |
|            | CH-PM-4B-L   | ф4   | ф2.3  | ф2.3  | 72.0     | _                          | 3000                       | 21   |
|            | CH-PM-5B-L   | ф5   | ф2.3  | ф2.3  | 72.5     | _                          | 3000                       | 21   |
|            | CH-PM-6B-L   | ф6   | ф2.3  | ф2.3  | 73.0     | _                          | 3000                       | 21   |
|            | CH-PM-10B-L  | ф10  | ф2.3  | ф2.3  | 75.0     | _                          | 2000                       | 21   |


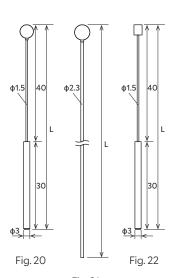


Fig. 21 CH-PM-4B-L CH-PM-5B-L CH-PM-6B-L CH-PM-10B-L

## Cylinder type

|  | - 3            |              |         |       |       |          |                            |                            |      |
|--|----------------|--------------|---------|-------|-------|----------|----------------------------|----------------------------|------|
|  | Equivalent     |              | Head    | Shaft | Shank | Overall  | Standard                   | Maximum                    |      |
|  | grit           | Product code | size    | dia.  | dia.  | length L | rotational                 | rotational                 | Fig. |
|  | (color)        |              | (mm)    | (mm)  | (mm)  | (mm)     | speed (min <sup>-1</sup> ) | speed (min <sup>-1</sup> ) |      |
|  | #800<br>(blue) | CH-PB-3R     | ф3 × 3  | ф1.5  | ф3    | 71.5     | 5000 - 8000                | 15000                      | 22   |
|  |                | CH-PB-4R     | φ4×4    | ф1.5  | ф3    | 72.0     | 5000 - 8000                | 13000                      | 22   |
|  |                | CH-PB-5R     | φ5 × 5  | ф1.5  | ф3    | 72.5     | 5000 - 8000                | 12000                      | 22   |
|  | #400           | CH-PO-3R     | ф3 × 3  | ф1.5  | ф3    | 71.5     | 5000 - 8000                | 15000                      | 22   |
|  | (orange)       | CH-PO-4R     | φ4 × 4  | ф1.5  | ф3    | 72.0     | 5000 - 8000                | 13000                      | 22   |
|  | (Grange)       | CH-PO-5R     | φ5 × 5  | ф1.5  | ф3    | 72.5     | 5000 - 8000                | 12000                      | 22   |
|  |                | CH-PM-3R     | ф3 × 3  | ф1.5  | ф3    | 71.5     | 5000 - 8000                | 15000                      | 22   |
|  | #220           | CH-PM-4R     | φ4×4    | ф1.5  | ф3    | 72.0     | 5000 - 8000                | 13000                      | 22   |
|  | (gray)         | CH-PM-5R     | φ5 × 5  | ф1.5  | ф3    | 72.5     | 5000 - 8000                | 12000                      | 22   |
|  |                | CH-PM-5R-C01 | ф5 х 10 | φ1.5  | ф3    | 72.5     | 5000 - 8000                | 12000                      | 22   |



## Disc type - stone

| Equivalent grit<br>(color) | Product<br>code | Head dia.<br>x thickness<br>(mm) | Max. rotational<br>speed<br>(min-1) | Fig. |
|----------------------------|-----------------|----------------------------------|-------------------------------------|------|
| #220 (gray)                | CH-PM-14D       | φ14 × 2                          | 5000                                | 23   |

## Disc type - shaft

| Product code | Shaft dia.<br>(mm) | Overall<br>length<br>(mm) | Mounting screw | Max. rotational<br>speed<br>(min <sup>-1</sup> ) | Fig. |
|--------------|--------------------|---------------------------|----------------|--|------|
| CH-D-SH      | ф2.3               | 78                        | M2 × 6         | 5000   | 24   |

## **Applications**

#### Deburring crosshole

### Aircraft pipe part



Material: Stainless steel Follows: Drilling Tool: CH-PM-6B

#### **Before**


Deburring was carried out with a rubber grinding stone on a rotary tool. Finish quality varied depending on the workers' skill. 40 minutes was required to deburr 16 crossholes.

#### After

The tool is inserted in a crosshole and retracted gently while tracing around the hole edge. Quality of finish is uniform and less time is required for deburring.

#### Deburring groove hole

#### Shaft



Material: SCM Follows: Drilling Tool: CH-PM-14D

#### Before

An oil-impregnated grinding disc was used. The grinding stone shaft was short, making it difficult to access the deburring area. Tool life was poor.

#### After

The longer shaft of the disc type grinding stone makes it easy to access the groove. The ceramic fiber stone is replaced less often because it has a longer tool life. The shaft is reusable. Only the grinding stone is replaced.

### How to use

The entire surface of the ceramic stone is abrasive and therefore can be used for deburring and polishing.

#### Ball type

## Cylinder type





### Disc type



#### Characteristics

The spring steel shaft absorbs vibrations for soft contact with the workpiece surface. The ceramic stone does not bounce around, thereby reducing the risk of scratching the workpiece. This makes this tool ideal for polishing and deburring areas that are deep inside the workpiece. The stone is safe to touch as it is not a cutting tool.





#### Trial set

This set includes a disc type stone and shaft.

Product code CHPM14D-SET

#### φ2.3 to φ3 Collet Adapter

Adapts the  $\phi$ 2.3 shaft to fit on rotary tools with  $\phi$ 3 shanks.

Product code RMP3024X

#### Precautions for use

A ceramic stone tool will be damaged when:

- used beyond the maximum rotation speed
- · used with a pneumatic rotary tool

Users of the disc type should be careful to use only normal (clockwise) rotation. Reverse (counter-clockwise) rotation may cause the screw to loosen and the head to fly off.




## **XEBEC Stone™ Mounted Point**

Suitable for use with pneumatic rotary tools at high rotational speed



## Applicable burr size

Burr thickness ≤ 0.2 mm (Burrs this size can be bent by fingernails)







## Applicable equipment




Rotary tool Rotary tool (electric) (pneumatic)

|  | Equivalent<br>grit<br>(color) | Product code | Head size<br>(mm) | Shank<br>dia.<br>(mm) | Head<br>length<br>(mm) | Overall length (mm) | Maximum rotational speed (min <sup>-1</sup> ) | Fig. |
|--|-------------------------------|--------------|-------------------|-----------------------|------------------------|---------------------|---|------|
|  | #220                          | AX-PM-3R     | ф3                | ф3                    | 20                     | 48                  | 60000   | 25   |
|  | #220                          | AX-PM-5RF    | ф5                | ф3                    | 8                      | 48                  | 30000   | 26   |
|  | (gray)                        | AX-PM-6T     | Ф6                | ф3                    | 20                     | 48                  | 60000   | 27   |

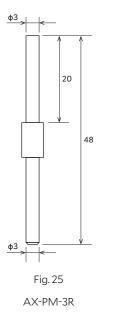

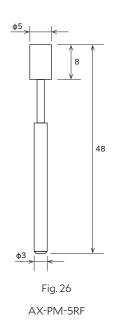

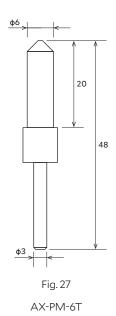

## **Applications**

## Deburring of edges



Material: Stainless steel Tool: AX-PM-6T

## Before

A file was used for deburring. However, it caused secondary burrs and a quality problem.

#### After

Secondary burrs are not formed and edge quality is improved.

## Deburring of parting lines



Material: Aluminum Tool: AX-PM-6T

#### Before -

A rotary bar was used because the burrs were large. However, there was a safety problem.

#### After

The switch to abrasive stone makes the process safer to perform. The ceramic fiber stone's grinding power improves work efficiency.

## How to use

All surfaces of the ceramic stone are abrasive and all of them can be used for deburring and polishing. These ceramic stones are capable of withstanding high speed. As such they can be used with pneumatic rotary tools in addition to electric rotary tools.







## **Mobile Micromotor System**

Battery-powered rotary tool for use at workstations where power supply is unavailable. The handpiece is ultra-lightweight, ideal for manual operation without causing fatigue.



| Product code | Matching shank<br>diameter<br>(mm) | Maximum rotational<br>speed<br>(min <sup>-1</sup> ) | Standard components  |
|--------------|------------------------------------|---|--|
| M2P33STX     | φ3 mm shank                        | 30000   | Handpiece with stand, controller,<br>ON/OFF foot switch, power cable<br>for charging |

<sup>■</sup> Capable of about 5 hours of continuous use on a single charge.


Technical Information

## XEBEC Brush™ Surface

#### How to select


Refer to the charts below and select the brush color based on the workpiece material, burr thickness and surface roughness.

#### **Deburring**

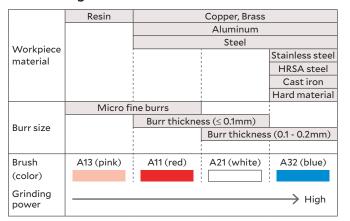

- Not all brush colors are available in all sizes.
- HRSA (heat resistant super alloy)

## Cutter mark removal and polishing

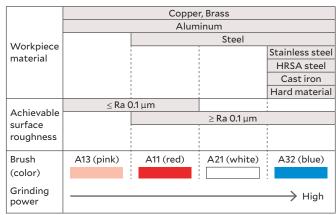

- Not all brush colors are available in all sizes.
- HRSA (heat resistant super alloy)

## Machining adjustments - Burrs remain

Take the following actions, if burrs remain despite using the recommended depth of cut for the given burr size.

## 1. Increase rotational speed

Increase the rotational speed to the maximum.

| Brush size<br>(mm) | Product code                               | Initial rotational<br>speed<br>(min <sup>-1</sup> ) | Maximum<br>rotational<br>speed<br>(min <sup>-1</sup> ) |
|--------------------|--|---|--|
| ф6                 | A13-CB06M, A11-CB06M, A21-CB06M, A32-CB06M | 8000  | 10000  |
| ф15                | A13-CB15M, A11-CB15M, A21-CB15M, A32-CB15M | 4800  | 6000   |
| ф25                | A11-CB25M, A21-CB25M, A32-CB25M            | 4000  | 5000   |
| ф40                | A11-CB40M, A21-CB40M, A32-CB40M            | 2400  | 3000   |
| ф60                | A11-CB60M, A21-CB60M, A32-CB60M            | 1600  | 2000   |
| ф100               | A11-CB100M, A21-CB100M, A32-CB100M         | 960   | 1200   |
| ф125               | A11-CB125M, A21-CB125M, A32-CB125M         | 800   | 1000   |
| ф165               | A11-CB165M, A21-CB165M, A32-CB165M         | 600   | 750  |
| ф200               | A11-CB200M, A21-CB200M, A32-CB200M         | 480   | 600  |

## 2. Check the rotational direction of the brush

XEBEC recommends cutting upwards so that the bristles lift burrs up.

### 3. Change the brush color

Check whether the brush color is suitable for the workpiece material and burr size. The grinding power of colors increases as follows: pink < red < white < blue.

## Machining adjustments - Edges too rounded

It is not possible to remove burrs with brushes without rounding edges to some extent. Take the following actions to improve edge sharpness.

#### 1. Increase feed rate

To make a sharper edge, increase the feed rate in 1,000 mm/min increments within the range where burrs can be removed. Increasing the feed rate also helps reduce the cycle time.

### 2. Decrease rotational speed

Decrease rotational speed in 10 to 20 percent increments within the range where burrs can be removed.

#### 3. Check the brush color

Check whether the brush color is suitable for the workpiece material and burr size. Rounding of edges increases as follows: pink < red < white < blue.


## Reference data - Tool life

### Example 1

| Material         | Aluminum die-casting |
|------------------|----------------------|
| Follows          | Face milling         |
| Burr thickness   | 0.1 mm               |
| Tool path length | 1000 mm/piece        |

| Tool             | A11-CB25M              |
|------------------|------------------------|
| Rotational speed | 4000 min <sup>-1</sup> |
| Feed rate        | 2400 mm/min            |
| Depth of cut     | 1 mm                   |
| Wear amount      | 50 mm out of 75 mm     |
|                  |                        |







### Example 2

| Material         | S45C         |
|------------------|--------------|
| Follows          | End milling  |
| Burr thickness   | 0.1 mm       |
| Tool path length | 200 mm/piece |
|                  |              |

| Tool             | A21-CB25M              |
|------------------|------------------------|
| Rotational speed | 4000 min <sup>-1</sup> |
| Feed rate        | 2000 mm/min            |
| Depth of cut     | 0.5 mm                 |
| Wear amount      | 50 mm out of 75 mm     |
|                  |                        |





- Tool life varies greatly depending on the material, machining conditions, and burr size and direction.
- The above data is not guaranteed. Please use as a guide.

## Machining adjustments - Surface roughness worsens

It may be possible to improve the surface finish. Try the following.

### 1. Check the brush color

The ability to improve surface roughness is inversely proportional to the grinding power, meaning that A13 (pink) achieves the best surface roughness, followed by A11 (red), A21 (white), and A32 (blue). Make sure to select the appropriate brush color based on the workpiece material and target surface roughness.

#### 2. Wet machining

The brush can be used for both dry and wet (oil-based and water-soluble) machining. Wet machining may improve surface roughness and tool life.

## 3. Increase the number of passes

When comparing with the same cycle time, increasing the number of passes makes a bigger difference than decreasing the feed rate.

### Example

| Rotational speed | 4000 min <sup>-1</sup> |
|------------------|------------------------|
| Depth of cut     | 0.5 mm                 |
| Feed rate        | 600 mm/min             |
| Number of passes | 1                      |

| Rotational speed | 4000 min <sup>-1</sup> |
|------------------|------------------------|
| Depth of cut     | 0.5 mm                 |
| Feed rate        | 1200 mm/min            |
| Number of passes | 2                      |


## Reference data - Surface roughness after deburring

| Material | A11 (red)                    | A21 (white)                  | A32 (blue)                   |
|----------|------------------------------|------------------------------|------------------------------|
| A5052    | Approx. Ra 0.6 μm, Rz 5.0 μm |                              |                              |
| S50C     |                              | Approx. Ra 0.2 μm, Rz 1.6 μm |                              |
| SUS304   |                              |                              | Approx. Ra 0.3 μm, Rz 2.4 μm |

## **XEBEC Brush™ Surface End Type**

## How to select

Refer to the chart below and select the brush color based on the workpiece material, burr thickness and surface roughness.

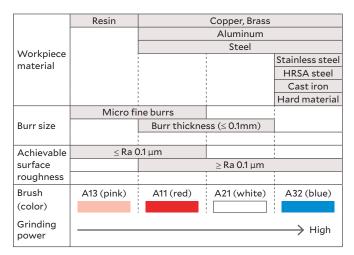

■ HRSA (heat resistant super alloy)

## **XEBEC Brush™ Turning**

## How to select

Refer to the charts below to select the brush color based on the workpiece material and burr thickness, and the holder based on the machining process.

#### **Brush selection**

| Burr size        | Micro fine burrs |              |               |
|------------------|------------------|--------------|---------------|
| burr size        |                  | Burr thickne | ss (≤ 0.1 mm) |
| Brush<br>(color) | A11 (red)        | A21 (white)  | A32 (blue)    |
| Grinding power   |                  |              | → High        |

■ Micro fine burrs have a burr height ≤ 0.01 mm.

#### Holder selection

| Process             |            | Holder                           | Brush angle |
|---------------------|------------|----------------------------------|-------------|
| Crosshole deburring |            | XEBEC Brush Turning Round Shank  | Fixed       |
| Thread              | ID threads | XEBEC Brush Turning Round Shank  | Fixed       |
| deburring           | OD threads | XEBEC Brush Turning Square Shank | Set by user |

■ Refer to "How to use: External thread deburring mechanism" for brush angle recommendations.

## **XEBEC Brush™ Crosshole**

## How to select

Refer to the chart below and select the brush color based on the workpiece material, burr thickness and surface roughness.

|                | Resin            | Steel            |
|----------------|------------------|------------------|
|                | Copper, Brass    | Stainless steel  |
| Workpiece      | Alum             | inum             |
| material       |                  | HRSA steel       |
|                |                  | Cast iron        |
|                |                  | Hard material    |
|                | Micro fine burrs |                  |
| Burr size      | Burr thi         | ckness (≤ 0.1mm) |
|                |                  |                  |
| Achievable     | ≤ Ra 0.1 μm      |                  |
| surface        |                  | ≥ Ra 0.1 µm      |
| roughness      |                  |                  |
| Brush          | A12 (red)        | A33 (blue)       |
| (color)        |                  |                  |
|                |                  | A34 (dark blue)  |
|                |                  |                  |
| Grinding power |                  | > High           |

■ HRSA (heat resistant super alloy)

## Machining adjustments - Burrs remain

Take the following actions, if burrs remain despite using the correct brush and rotational speed for the given burr size.

- 1. Check the brush color
- 2. Increase rotational speed to the maximum
- 3. Increase the number of passes
- 4. Decrease the feed rate

## Machining adjustments - Extending tool life

Try the following, if tool life is short despite using the correct brush for the given burr size.


## 1. Decrease the rotational speed


#### 2. Increase the feed rate

#### Example

| Material       | S45C     |
|----------------|----------|
| Follows        | Drilling |
| Burr thickness | 0.1 mm   |
| Main bore      | ф10 mm   |
| Crosshole      | φ5 mm    |

| Tool             | CH-A12-5M-TL            |
|------------------|-------------------------|
| Rotational speed | 10000 min <sup>-1</sup> |
| Feed rate        | 300 mm/min              |
| Depth of cut     | 1 mm                    |
| Wear amount      | 10 mm out of 50 mm      |
|                  |                         |





- Tool life varies greatly depending on the material, machining conditions, and burr size and direction.
- The above data is not guaranteed. Please use as a guide.

## **XEBEC Brush™ Surface Wheel Type**

## Machining adjustments - Burrs remain

Take the following actions, if burrs remain despite using the recommended depth of cut for the given burr size.

#### Increase the feed amount

Increase the feed amount in increments of 10 to 20 percent.

## Machining adjustments - Extending tool life

Try the following, if tool life is short despite using the correct brush for the given burr size.

#### Increase the feed amount

Increase the feed rate in increments of 10 to 20 percent.


## Reference data - Tool life

It is not possible to remove burrs with brushes without rounding edges to some extent. Take the following actions to improve edge sharpness.

## Example

| Material         | S45C         |  |
|------------------|--------------|--|
| Follows          | End milling  |  |
| Burr thickness   | 0.1 mm       |  |
| Tool path length | 120 mm/piece |  |

| Tool               | W-A11-50                  |  |  |
|--------------------|---------------------------|--|--|
| Cutting speed      | 250 m/min                 |  |  |
| (Rotational speed) | (1600 min <sup>-1</sup> ) |  |  |
| Feed per bundle    | 0.7 mm/bundle             |  |  |
| (Feed rate)        | (7000 mm/min)             |  |  |
| Depth of cut       | 0.2 mm                    |  |  |
| Wear amount        | 50 mm out of 75 mm        |  |  |
| Depth of cut       | 0.2 mm                    |  |  |



| Tool life | 600 m (5000 pieces) |
|-----------|---------------------|
|           |                     |

- Tool life varies greatly depending on the material, machining conditions, and burr size and direction.
- $\blacksquare$  The above data is not guaranteed. Please use as a guide.

## **XEBEC Floating Holder™**

## Maintenance

Schedule a regular maintenance for cleaning and greasing sliding parts to ensure smooth movement and functioning. Recommended grease: Lithium soap grease (NLGI Grade #2).

## **Safety Precautions**

- Please make sure to read the instruction manual before use.
- In order to ensure safety, be sure to observe the operator safety measures and operational precautions listed below.

The following precautions exist to ensure safe use of the products and prevent injury to persons using the products and other persons in the vicinity, as well as prevent property damage. They are classified as "Warnings" and "Cautions" depending on the level of potential injury and danger involved. "Warnings" and "Cautions" should be strictly observed as they all are related to safety.

### [WARNINGS]

These have the potential to cause death or serious injury to persons or serious property damage if handled improperly.

### [CAUTIONS]

These have the potential to cause injury to persons or property damage if handled improperly.



# 🚺 Warnings

## [Use of protective clothing and equipment]

Wear safety glasses, protective gloves and masks when using the tools. Wear clothing with long sleeves or other clothing that does not expose the skin. Cuffs and hems of clothing should be tightly fastened.

#### [Use of protective covers]

Machine tools and dedicated machines should be equipped with covers and other safety measures capable of protecting users from injury in the event of tool fragmentation.

## [Cutting dust and particles]

Cutting dust and burrs are scattered into the air with the rotation of the tool. These should be removed by a dust collector and persons should not enter the affected area.

## [Work surroundings]

An enclosure should be installed around the work area to prevent persons other than the operator from entering the work area. Persons who enter the work area should always wear protective clothing and use protective equipment.

Ignoring the aforementioned warnings may result in the following:

- Fragments and cutting particles may enter the eyes, causing loss of sight in severe cases.
- Fragments and cutting particles may cause injury by cutting into skin.
- Cutting dust resulting from tool use may irritate the skin, cause allergic reactions and damage lungs.



## Cautions

### [Prior to machining]

Operate the tool for at least one minute (3 minutes after the tool has been replaced) before conducting any actual cutting. Cease operation immediately in the event of any sign of abnormality with the machine or loosening of the tool shank. Continued use may result in the shank flying out of the holder, causing damage to the machine, the jig, and workpiece, as well as injury or loss of sight to the operator.

## [Abnormal vibration]

Cease operation immediately at the first sign of abnormalities such as vibration. Continued use may result in the shank flying out of the holder, causing damage to the machine, the jig, and workpiece, as well as injury or loss of sight to the operator.

## [Maximum rotational speed]

Do not operate the tool beyond its maximum rotational speed. Set the machining conditions based on the instruction manual. Operation at speeds beyond the maximum rotational speed may damage the tool, the machine, the workpiece, and also cause loss of sight or other injury to the operator.

- A dust collector should be used during machining and cleaned thoroughly afterwards.
- Insufficient removal of dust and cleaning of dust collectors may result in damage to machine tool slides and other exposed sliding surfaces.

## About XEBEC

## **Beautiful deburring**

XEBEC has been helping factories and machining shops around the world automate their deburring processes since 2002. With our wealth of knowledge accumulated over the years, we strive everyday to solve customer deburring problems faster than before. We aim to change the way people think about deburring and create value-added in customers' finishing processes. A world where people can make use of their creative talents to the fullest, is a world where XEBEC wants to be.

## **XEBEC's three innovations**

## **Technology innovation**

Ongoing technological innovation through integration of materials, hardware and software from many scientific fields enables us to find superior solutions to fundamental problems.

#### **Process innovation**

Challenging accepted practices to optimize and innovate business processes such as product marketing, manufacturing, sales and delivery.

## **Precision Management**

Attaching the upmost importance to every aspect of quality management, such as stable product quality, shipping accuracy, and timely and polite customer support.

## **Corporate outline**

| Corporate name  | XEBEC Technology Co., Ltd June 3, 1996  | Head office | Fuerte Kojimachi 1-7 Building 4F<br>Kojimachi 1-7-25, Chiyoda-ku<br>Tokyo, Japan 102-0083 |
|-----------------|---|-------------|---|
| Main business   | Development, manufacturing and sales of industrial tools for deburring, polishing, chamfering, and surface finishing. |             | Tel. +81-3-3239-3481<br>Fax. +81-3-5211-8964  |
| Capitalization  | JPY 99,000,000  |             |   |
| President & CEO | Norihiko Sumiyoshi  |             |   |

# History

| XEBEC Brush Turning™ released.  | Oct. 2025 |  |
|---|-----------|--|
|   | Dec. 2023 | XEBEC Burrless Chamfering Cutter chosen product of the year in Germany's Best of Industry Awards (machining category). |
| XEBEC Burrless Chamfering Cutter™ released.                               | Jul. 2023 |  |
| XEBEC Stone <sup>™</sup> Flexible Shaft Disc Type released.               | Feb. 2022 |  |
| XEBEC Brush™ Crosshole Extra-Large released.                              | Sep. 2021 |  |
|   | Nov. 2018 | Corporate branding renewed.  |
|   | Jun. 2018 | XEBEC Back Burr Cutter and Deburring Tool Path a finalist in Germany's Best of Industry Awards (machining category).   |
|   | Mar. 2017 | 'Deburring Productivity Day' certified by Japan Anniversary Association  |
| XEBEC Brush $^{™}$ Wheel Type released.                                   | Oct. 2016 |  |
| XEBEC Back Burr Cutter and Deburring Tool Path™ released.                 | Jun. 2016 |  |
|   | Nov. 2015 | 'XEBEC Plus Engineering Center' opened in Okazaki, Aichi.  |
| XEBEC Self-Adjusting Sleeve™ released.                                    | Oct. 2015 |  |
| Mobile Micromotor System released.  | Apr. 2015 |  |
|   | Mar. 2015 | One of 100 companies awarded the Diversity Management Award by the Ministry of Economy, Trade and Industry.            |
|   | May 2014  | Headquarters moved to current location at Kojimachi,<br>Chiyoda-ku, Tokyo.   |
|   | Jun. 2013 | 'XEBEC Plus R&D Center' opened in Ota-ku, Tokyo.<br>Vertical machining center (with additional axis) acquired.         |
| XEBEC Brush Length Adjustment Tool™ released.                             | Apr. 2013 |  |
|   | Aug. 2012 | Test cut facility established at the head office.<br>SCARA robot acquired.   |
| XEBEC Floating Holder™ released.  | Oct. 2010 |  |
| $XEBECStone^{TM}MountedPointreleased.$                                    | Oct. 2008 |  |
|   | Oct. 2007 | Norihiko Sumiyoshi appointed president and CEO.  |
| XEBEC Stone™ Flexible Shaft released.<br>XEBEC Brush™ Crosshole released. | Nov. 2004 |  |
| XEBEC Brush™ Surface released.  | Apr. 2002 |  |
| XEBEC Ceramic Stone™ Meister Finish released.                             | May 1998  |  |
|   | Jun. 1996 | XEBEC Technology Co., Ltd incorporated.<br>(Founder: Takehiko Sumiyoshi)   |
|   |           |  |



## XEBEC Technology Co., Ltd

Fuerte Kojimachi 1-7 Building 4F, 1-7-25 Kojimachi Chiyoda-ku, Tokyo, 102-0083, Japan Tel. +81-3-3239-3481 Fax. +81-3-5211-8964 www.xebec-tech.com customerservice@xebec-tech.co.jp